

A *Nidec* Group Company

SERVO

— All for dreams

Brushless DC Motors & Speed Control Drivers

FHD•FYD Series



BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

FHD Series

DC24V (20, 40W) DC48V (60W)

■Distinguishing Features

1. Motors are designed small and high performance
 - We recently released a special magnetic circuit design motor. This motor design is smaller and has a higher performance than conventional FED, FVD series motors.
 - Flange size of this series is 61mm sq. (2.4 in sq.). However flange size of 40W & 60W types are 80mm sq. (3.1 in sq.)
2. Compact design Driver
 - "Palm Mini R" Type is the smallest. (20W, 40W only)
 - "Palm Mini PLUS" Type is small. (20W, 40W only)
 - "J - Book" Type is (60W only)
 - High power type is a circuit-board and superconducting type. (20W, 40W)
3. Wide Ranged Speed Control (60W only)
 - Wide range (200r/min-2500r/min 60W:65r/min-2500r/min), stepless speed control.
 - Very steady characteristics (Feed back control employed).
4. Speed pulse output
 - Speed pulse output can be used for speed monitoring, simplified position control...
 - "Palm Mini R" Type: 42 pulse/revolution
 - "Palm Mini PLUS" Type: 42 pulse/revolution
 - "J - Book" Type: 42 pulse/revolution
 - "High power simple" Type: 7 pulse/revolution output is available for speed monitoring and simplified position control are possible.
5. Direction of rotation signal output
 - Direction of rotation can be monitored by this signal.
6. Alarming
 - At an over-load condition, the motor stops and an alarm signal is output.



■Model Code

Model on set FHD 6 P 20 PF - D3

①
②
③
④
⑤
⑥

- ① Series name
- ② Motor flange dimensions
6 : 61×61mm (2.4×2.4 in.)
- ③ Driver type
P: Palm mini PLUS type
J: J - Book type
- ④ Motor output
20: 20W
40: 40W
60: 60W

- ⑤ Motor output shaft type
S : Plain shaft
PF: Pinion shaft
PE : Pinion shaft
- ⑥ Power supply voltage
D3: DC24V
D5: DC48V

Model on motor FH 6 PF 20 H - D3

①
②
③
④
⑤
⑥

- ① Series name
- ② Adapting motor flange dimensions
6: 61×61mm (2.4×2.4 in.)
- ③ Motor output shaft type
S: Plain shaft
PF: Pinion shaft
PE: "

- ④ Motor output
20: 20W
40: 40W
- ⑤ Adapting Driver type
H: High power simple type driver
R: Palm mini R type driver
- ⑥ Power supply voltage
D3: DC24V

Model on driver FHD 6 20 H D3


①
②
③
④
⑤

- ① Series name
- ② Adapting motor flange dimensions
6: 61×61mm (2.4×2.4 in.)
- ③ Motor output
20: 20W
40: 40W

- ④ Driver type
H: High power simple type driver
R: Palm mini R type driver
(Holding torque can be generated)
- ⑤ Power supply voltage
D3: DC24V

NEW

Palm mini R type

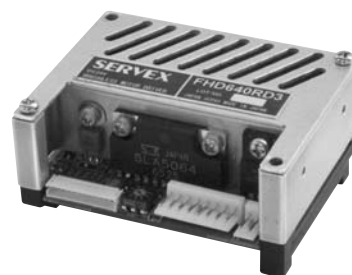


■Specification


Model on motor		Plain shaft type	FH6S20R-D3		FH6S40R-D3	
		Pinion shaft type	FH6PF20R-D3		FH6PE40R-D3	
Model on driver			FHD620RD3		FHD640RD3	
Rated voltage		V (DC)	24		24	
Rated output		W	20		40	
Speed control range		r/min	100~2500		100~2500	
Rated torque		mN • m	98		200	
		oz • in	14		28	
MAX. instantaneous torque (in 5sec.)		mN • m	150 (2000r/min MAX.)		290 (500r/min MAX.)	
		oz • in	21 (2000r/min MAX.)		42 (500r/min MAX.)	
Rated speed		r/min	2000		2000	
Speed setting method			①Speed setting by internal speed setter			
			②Speed setting by external speed setter (Sold separately : model code Q-R10KB)			
			③Speed setting by external voltage supply 0~10V			
Speed setting		(r/min)/V	300±5%			
Speed variation			Against load	±1%	0~rated torque at rated voltage and speed	
			Against voltage	±1%	Rated voltage ±10% at rated speed, no load	
			Against temperature	±1%	20±20°C at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN, HT, INT H : Open collector L : GND (0~1.5V) ※HT: Rotor stop position maintenance			
		Output	ALARM OUT, SPEED OUT, F/R OUT Open collector output DC30V MAX. 2mA MAX.			
Speed pulse		Pulse/Revolution	42		42	
Current	Rated (Ave.)		1.8 MAX.		3.1 MAX.	
	MAX. (Peak)		9 MAX.		10 MAX.	
Acceleration time adjustment			0.5 to 10 seconds in the condition of rated speed, no load and no inertia The acceleration time is changed by the load and the inertia value.			
Rotor stop position maintenance			Rated torque x 0.5			
Protection functions			Overload protection, High & Low voltage protection, Overspeed protection function Overheat protection and Hall IC signal disconnection protection			
Others			Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) (Between case and coil by DC500V tester)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 100r/min	at 2000r/min	6H□EBN		8F□EBN	
			mN • m	oz • in	mN • m	oz • in
5	20	400	390	56	780	110
10	10	200	780	110	1600	220
25(25.44)	4	80	1700	240	3600	510
50(49.6)	2	40	3500	500	7000	990

- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.
- □: rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in () should be used as gear ratio.

Torque Speed/Current (TYP.) Characteristics FH6S(PF)20R-D3+FHD620RD3

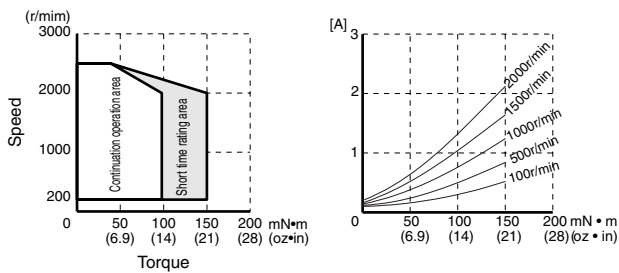


FH6S(PE)40R-D3+FHD640RD3

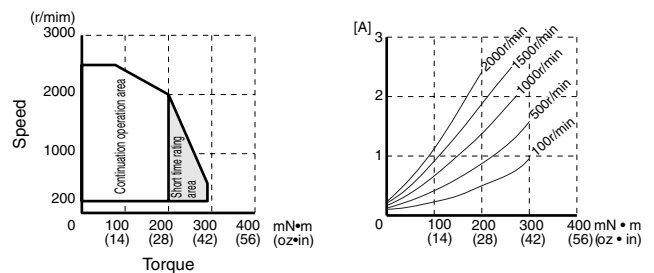

Input & output terminals and wiring diagram

Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24V±10%
	2	Black	P.GND	—	Power supply GND for driver	
I/O	1	Brown	ALARM OUT	Output	H: Normal operation L: Alarm output	H: Open collector L: 0.6V MAX. Output DC30V MAX. & 2mA MAX
	2	Red	SPEED OUT	Output	42 Pulse /Revolution ※1	
	3	Orange	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	4	Yellow	F/R IN	Input	H: CCW L: CW order (Viewed from motor output shaft side)	H: Open collector L: 0~1.5V
	5	Green	BRAKE ※	Input	H: BRAKE Deactivated L: BRAKE activated It functions in RUN signal "L"	
	6	Blue	RUN	Input	H: Stop L: Start It functions in RUN signal "L"	
	7	Purple	HT	Input	H: Holding torque OFF L: Holding torque ON It functions in RUN signal "L"	H: The motor is controlled by the speed voltage from the inside command. L: The motor is controlled by the speed voltage from the External command.
	8	Gray	INT	Input		
	9	White	GND	—	GND for I/O signals	
	10	Black	VR	Output	Power supply positive for external speed setting	0~10V
	11	Brown	VS	Input	Speed setting signal positive	
	12	Red	GND	—	Speed setting signal GND	

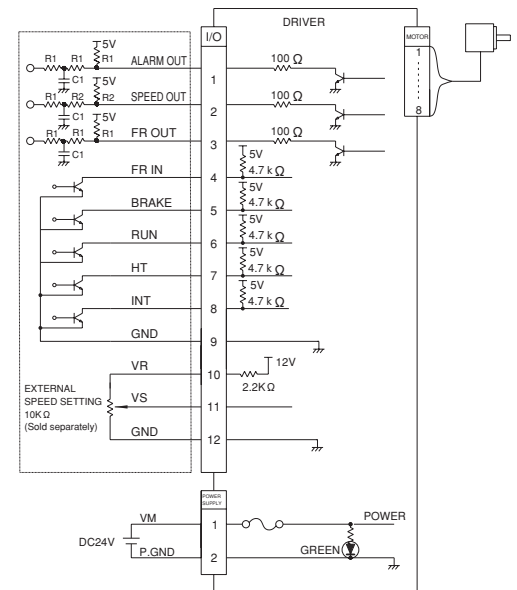

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF


- ※1 The speed output signal is as follows.
 ※2 • Reverse rotation brake and short circuit brake
 • "BRAKE" has priority over "RUN".
 • During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.

Protection

Protection function	Protection		Alarm Release
	Description	Operation	
Overload Protection function	Activated when the load exceeds the rated torque for more than 5 seconds. Disconnection protection in hall IC	The driver will cause the motor to stop and "ALARM" will output "L".	Alarm is released when Run-signal was inputted 2 times or shut-down the supply voltage more than 1 minute period. (When release the protection, two times Run-signal input shall be done within one sec.)
Disconnection-protection in hall IC	The protection operates when the abnormal feed-back signal appeared from the motor.	The LED will blink for the corresponding number of times shown right chart.	
High & Low voltage-protection	Activated when the power supply voltage exceeds about 27.6 VDC or drops below about 18 VDC for more than 1 second.		
Acceleration protection	Activated when the actual motor speed exceeds 15% higher than the specified speed for more than 1 second.		
Overspeed protection	Activated when the temperature of PCB surface inside of the driver exceeds about 85 °C.		

The confirmation of load is more than or less than rated load, it is not checked by using over-load protection operation and less than rated load operation shall be prepared.


※1 "SPEED OUT" signal is shown below

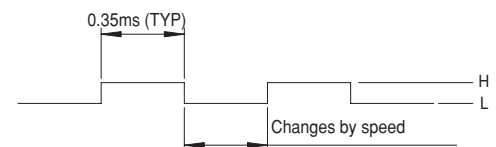

Protection name	LED Blinking
Overload Protection	1 time
Disconnection protection of Hall IC signal	2 times
High & Low voltage-protection	3 times
Acceleration protection	4 times
Overspeed protection	5 times

Note. The above LED blinking are repeated by the each two seconds period.

Control sequence

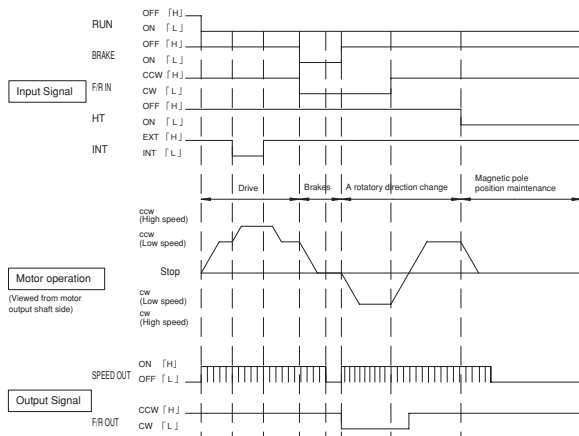

The INT signal is the signal that switches internal speed specified voltage and external speed specified voltage. In this control sequence, the voltages are set up as internal speed voltage for low speed and external speed voltage for high speed operation.

Speed setting

Fig.1 Speed setting by external speed setter



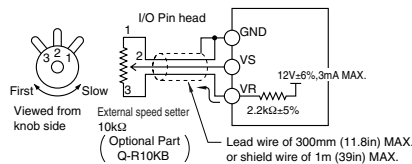



Fig.2 Speed setting by external voltage supply




Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as an external speed setter.
Speed of internal speed setting device	The speed setting is done by VR2 of Fig.3 But I/O 8pins INT signal is defined as "H".
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.


Fig3 Driver external from and internal organs LED and a trimmer

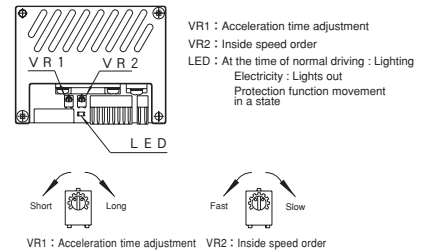

Driver outline Unit: mm (inch)

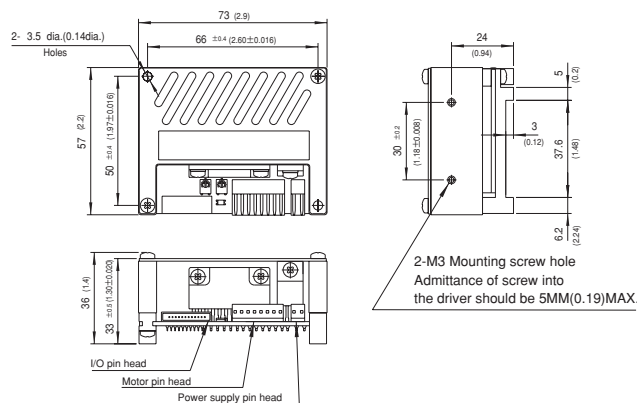


Accessory Unit: mm (inch)

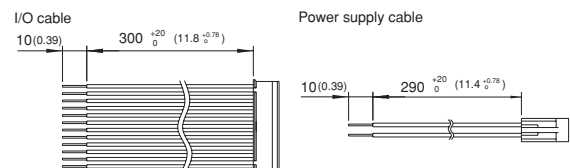

Connector model code

Item	Pin head model code on drive	Connector model code on cable		Maker
		Housing	Contact (chained)	
I/O connection	171826-08	171822-8	170262-1	AMP
Power supply connection	171826-02	171822-2	170262-1	
Motor connection	512B-ZR-5M4A	ZHR-12	SZH-002T-P0.5	JST

Motor outlines (Plain shaft type) Unit: mm (inch)

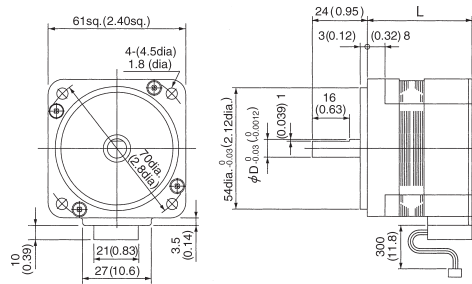


	Model	L	Weight	
			Kg	(lb)
①	FH6S20R-D3	46 (18.1)	0.5	1.1
②	FH6S40R-D3	60 (2.36)	0.7	1.5

	① ② PIN #	Lead wire color	Item	Remark
Motor connector	1	Purple	HU	Open collector
	2	Blue	HV	Open collector
	3	Green	HW	Open collector
	4	White	12V	
	5	Gray	GND	
	6	Orange	Coil W	
	7	Red	Coil V	
	8	Brown	Coil U	

Motor (Pinion shaft type) + Gear head outlines


FH6PF20R-D3+6H EBN

Unit: mm (inch)

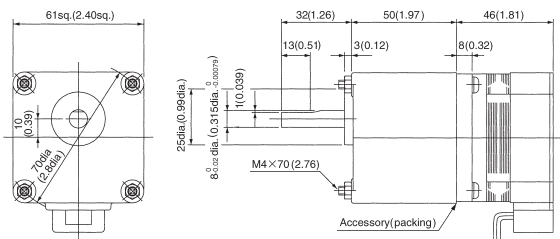

Gearhead weight 0.5Kg (1.1Lb)
Bolts (accessory) M4×70 (2.76)

FH6PE40R-D3+8F EBN

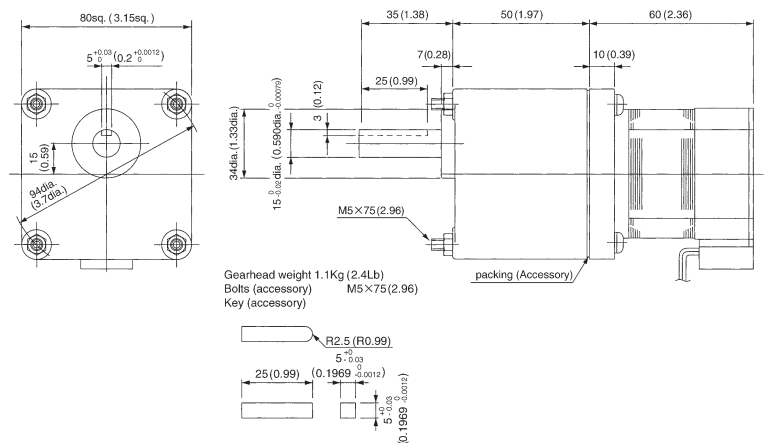

Gearhead weight 1.1Kg (2.4Lb)
Bolts (accessory) M5×75 (2.96)
Key (accessory)


Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

		Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code
FHD series	Palm mini R type	FH6S20R-D3	FHD620RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6PF20R-D3	FHD620RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6S40R-D3	FHD640RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6PE40R-D3	FHD640RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)

※ The power supply cable types for FHD series are the same as those for FED series.

The I/O cable types for FHD series are the same as those for FYD series.

Palm mini PLUS type J-Book type

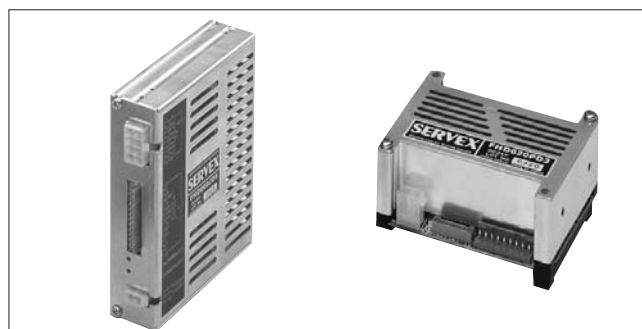


■Specification


Model on set			Plain shaft type		FHD6P20S-D3		FHD6P40S-D3		FHD6J60S-D5			
			Pinion shaft type		FHD6P20PF-D3		FHD6P40PE-D3		FHD6J60PE-D5			
Rated voltage			V (DC)		24		24		48			
Rated output			W		20		40		60			
Speed control range			r/min		200~2500		200~2500		65~2500			
Rated torque			mN・m		98		200		290			
			oz・in		14		28		42			
MAX. instantaneous torque (in 5sec.)			mN・m		150 (2000r/min MAX.)		290 (500r/min MAX.)		440 (1500r/min MAX.)			
			oz・in		21 (2000r/min MAX.)		42 (500r/min MAX.)		62 (1500r/min MAX.)			
Rated speed			r/min		2000		2000		2000			
Speed setting method					①Speed setting by external speed setter (Sold separately: model code Q-R10KB)							
					②Speed setting by external voltage supply 0~10V							
Speed setting			(r/min)/V		300±5%							
Speed variation					Against load		±1%	0~rated torque at rated voltage and speed				
					Against voltage		±1%	Rated voltage ±10% at rated speed, no load				
					Against temperature		±3%	20±20°C at rated voltage and speed, no load				
Input and output signal			Input		RUN, BRAKE, F/R IN, ALARM RST (Only 60W) H: Open collector L: GND (0~0.8V)							
			Output		ALARM, SPEED OUT (PULSE OUTPUT), F/R OUT Open collector output DC30V MAX. 10mA MAX.							
Speed pulse			Pulse/Revolution		42		42		42			
Current	Rated (Ave.)		A	1.8 MAX.		3.1 MAX.		2.3 MAX.				
	MAX. (Peak)			9 MAX.		10 MAX.		10 MAX.				
Protection functions					Over load protection When an exceeding torque than rated is applied to motor for more than about 5 sec., Stop motor and outputs "L" from "ALARM" (20W, 40W) or "ALARM OUT" (60W). To release alarm : Palm Mini PLUS type: Disconnect power supply for more than 1min J-Book type: Input "L" to "ALARM RST" for more than 1sec. Do not measure/ judge by this operation whether the motor is overloaded or not.							
Others					Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) 100MΩMIN. (60W) (Between case and coil by DC500V tester)							
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads									
	at 200r/min	at 2000r/min	6H□EBN		8F□EBN							
			mN・m	oz・in	mN・m	oz・in	mN・m	oz・in				
5	40	400	390	56	780	110	1200	170				
10	20	200	780	110	1600	220	2400	330				
25(25.44)	8	80	1700	250	3600	510	5500	780				
50(49.6)	4	40	3500	500	7000	1000	10600	1500				

- : rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in () should be used as gear ratio.


Torque Speed/Current (TYP.) Characteristics FHD6P20S(PF)-D3

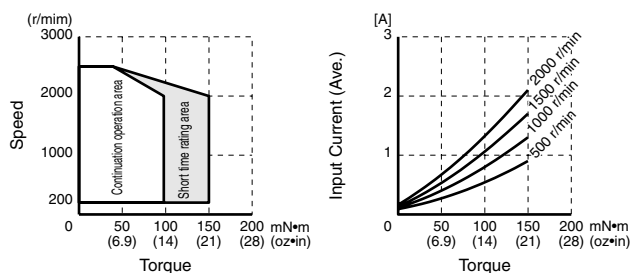

FHD6P40S(PE)-D3

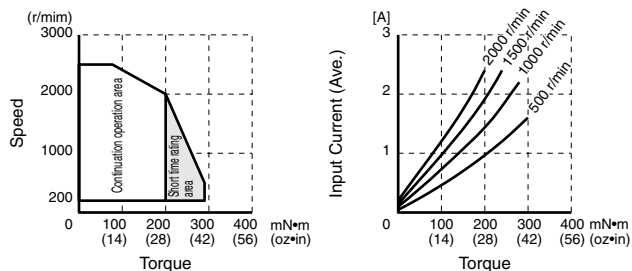


FHD6J60S(PE)-D5

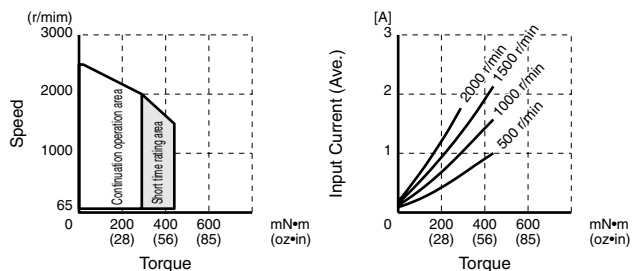

Motor outlines (Plain shaft type)

Unit: mm (inch)

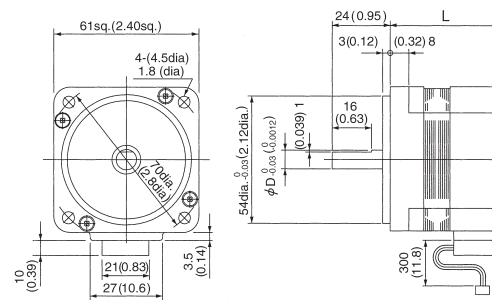

	Model	L	D:dia	Weight	
				Kg	(lb)
①	FHD6P20S-D3	46 (18.1)	8 (0.3150)	0.5	1.1
②	FHD6P40S-D3	60 (2.36)	8 (0.3150)	0.7	1.5
③	FHD6J60S-D5	60 (2.36)	10 (0.3937)	0.7	1.5


Connection guide

	Symbol	20 / 40W		60W		Remark
		① ② PIN #	Lead wire color	③ PIN #	Lead wire color	
Motor connector	Coil U	1	Brown	3	Brown	
	Coil V	2	Red	4	Red	
	Coil W	3	Orange	8	Orange	
	—	4	—	—	—	
	HW	5	Green	7	Green	Open collector
	HV	6	Blue	6	Blue	Open collector
	HU	7	Purple	5	Purple	Open collector
	GND	8	Gray	1	Gray	
	12V	9	White	2	White	

Motor (Pinion shaft type) + Gear head outlines


FHD6P20PF-D3+6H□EBN

Unit: mm (inch)

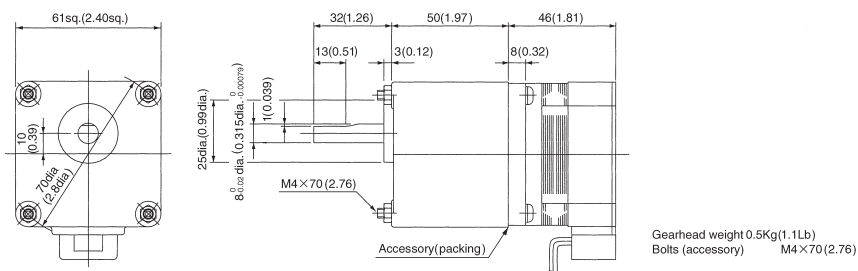

FHD6P40PE-D3+8F□EBN

FHD6J60PE-D5+8F□EBN

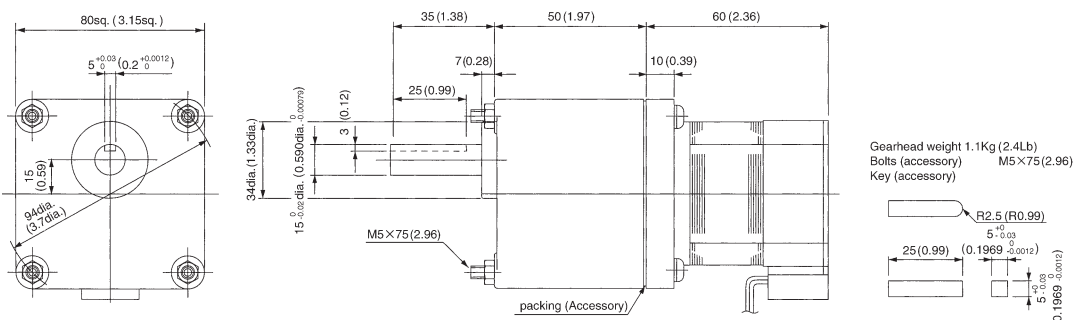


Input & output terminals and wiring diagram


FHD6P20S(PF)-D3

FHD6P40S(PE)-D3

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC24V±10%
	2	P.GND	—	Power supply GND for driver	
I/O	1	SPEED OUT	Output	42 Pulse/Revolution *3	*1 H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	3	VR	Output	Power supply positive for external speed setter	0~10V
	4	VS	Input	Speed setting signal positive	
	5	GND	—	Speed setting signal GND	
	6	GND	—	GND for I/O Signal	Same as *1
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	
	8	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	*2 H: Open L: 0~0.8V
	9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V During the operation of "BRAKE", "RUN" signal be "L".
	10	RUN	Input	H: Stop L: Start	Same as *2

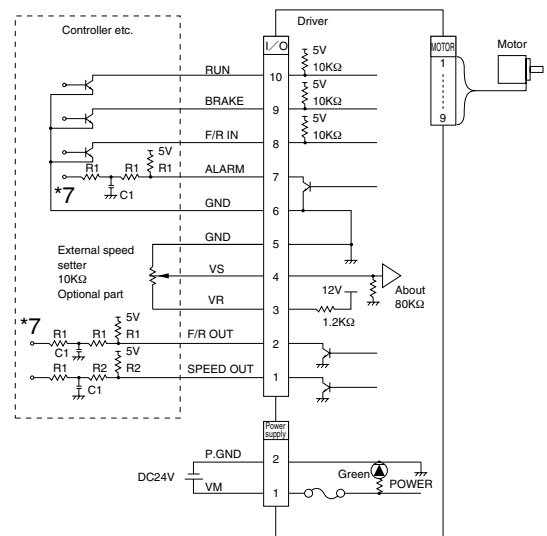


*3 "SPEED OUT" signal is shown below.



FHD6J60S(PE)-D5


Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC48V±10%
	2	P.GND	—	Power supply GND for driver	
I/O	1	NC	—		*4 H: Open L: 0~0.8V
	2	RUN	Input	H: Stop L: Start	
	3	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	
	4	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	
	5	SPEED OUT	Output	42 [Pulse/Revolution] *6	Same as *5
	6	ALARM RST	Input	H: Normal operation L: Reset	Same as *4
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	
	8	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	*5 H: Open collector DC30V MAX. L: 0~0.8V, 10mA MAX.
	9	GND	—	GND for I/O Signal	0~10V
	10	GND	—	Speed Setting Signal GND	
	11	VS	Input	Speed Setting Signal Positive	
	12	NC	—	Not Connected	
	13	VR	Output	Power Supply Positive for External Speed Setter	

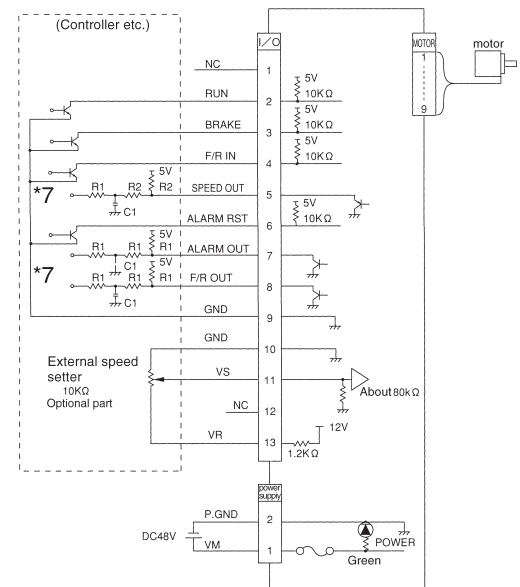

*8

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

*6 "SPEED OUT" signal is shown below.



note

- When input signal is H, input signals (RUN, BRAKE, F/R IN, and ALARM RST (60 W Only)) should be input by open collector. If you input 5 V, it will cause the operation to malfunction.
- Noise of output signals ("ALARM" (20W, 40W) "ALARM OUT" (60W)), "F/R OUT", "SPEED OUT") should be removed by a filter as shown in figure above. (*7) Setting of filter constant should be done by confirming the noise level referring to the recommended constant. (*8) The signal delays if the resistance and/or capacitor is large. However, this is a good way to control the noise. Especially for speed out, setting should be done with attention to filter constant because pulse width is narrow.

Speed setting

Fig.1 Speed setting by external speed setter



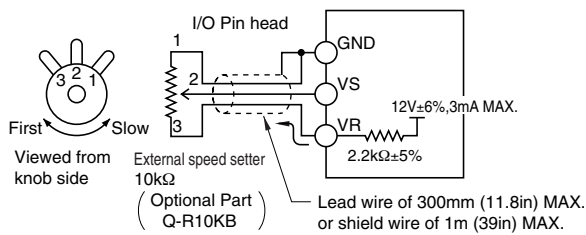


Fig.2 Speed setting by external voltage supply

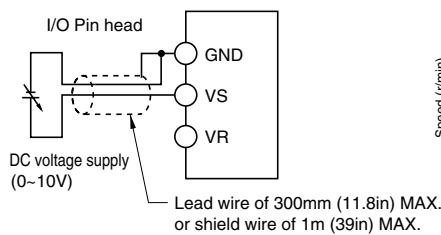

Should be used within specified speed control range, although the speed could be set at out of the speed range.


I/O Pin head Pin No.

	FHD6P20S (PF)-D3 FHD6P40S (PE)-D3	FHD6J60S(PE)-D5
GND	5	10
VS	4	11
VR	3	13

Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[kΩ] as an external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

Control sequence

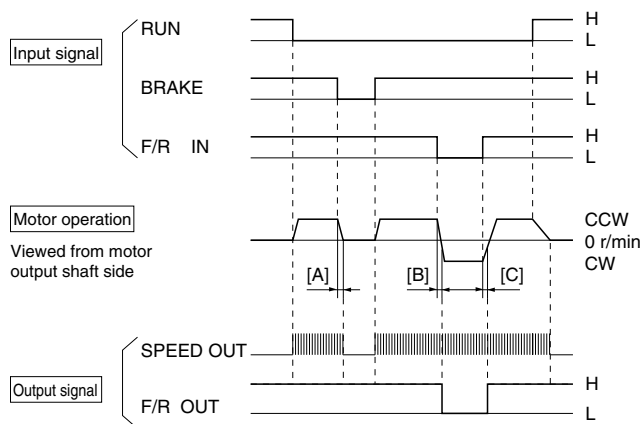

[Notes for BRAKE Operation & Rotation change]

- (1) Do not change (period [A] left) the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.
- (2) During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same.
- (3) When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H"→"L") must not be made.
- (4) During the brake is operating, set the "RUN" signal at "L" all the time.

WARNING:

In case of different way of use from (1), (2), (3) and (4), (1), (2), and (4) may be the cause of the incorrect operation and (3) may be the cause of the fire or the breakdown.


Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)

[Notes on "F/R OUT"] (20,40W only)

During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0~5pulses of "SPEED OUT" from the motor rotation switched.

FHD6J60S(PE)-D5

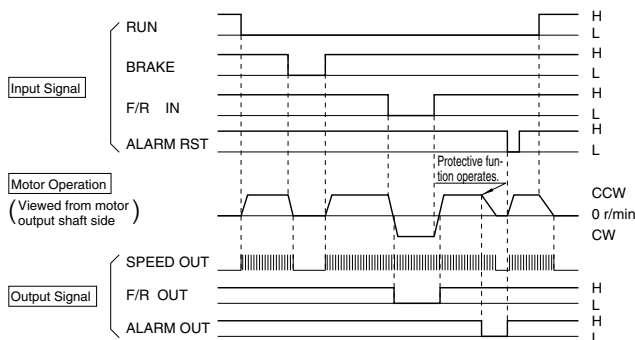

[Notes for "F/R OUT"] (60W only)


In case that motor is not running, "F/R OUT" holds the signal which has been output until motor stops. But according to the condition of use, there may be a case that motor runs reversely by cogging torque, load etc. After it stops. Be careful that in such case "F/R OUT" reverses and holds that condition.

[Notes for "ALARM RST"] (60W only)


Operation should be done by "H". If operated by "L", overload protective function will not work.

■Driver outline Unit: mm (inch)


FHD6P20S(PF)-D3 FHD6P40S(PE)-D3

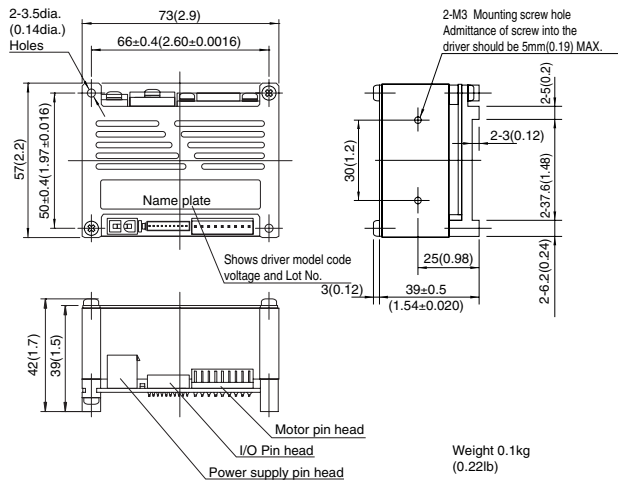

FHD6J60S(PE)-D5

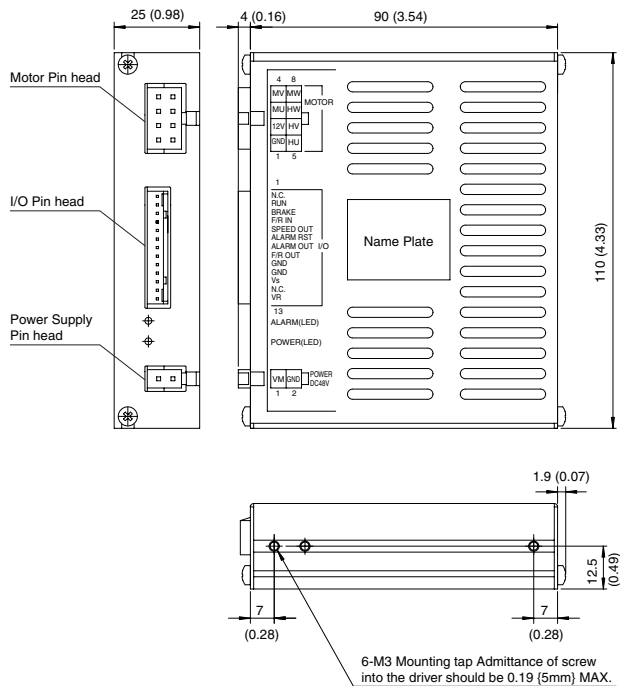


■Accessory Unit: mm (inch)

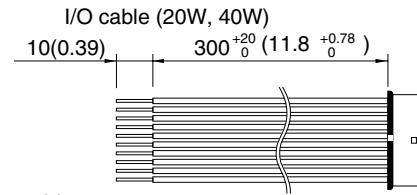

Connection guide


Pin No.	Name	Lead wire color	Lead wire
1	SPEED OUT	Brown	UL3265 AWG28
2	F/R OUT	Red	
3	VR	Orange	
4	VS	Yellow	
5	GND	Green	
6	GND	Blue	
7	ALARM	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	

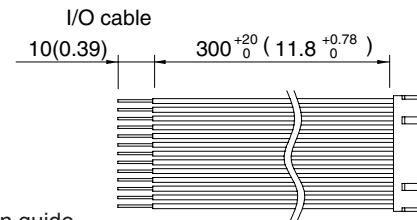

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	NC	Brown	UL1007 AWG26
2	RUN	Red	
3	BRAKE	Orange	
4	F/R IN	Yellow	
5	SPEED OUT	Green	
6	ALARM RST	Blue	
7	ALARM OUT	Purple	
8	F/R OUT	Gray	
9	GND	White	
10	GND	Black	
11	VS	Brown	
12	NC	Red	
13	VR	Orange	

Power supply cable (20W, 40W, 60W)



Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430 AWG22
2	P. GND	Black	

■Connector model code

Output	Item	Pin head model code on drive	Connector model code on cable		Maker
			Housing	Contact (chained)	
20W 40W	I/O connection	IL-Y-10P-S15T2-EF	IL-Y-10S-S15C3	IL-Y-C3-A-10000	JAE
	Power supply connection	5566-02A	5557-02R	5556T	MOLEX
	Motor connection	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC10000	JAE
60W	I/O connection	IL-G-13P-S3L2-SA	IL-G-13S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Power supply connection	5569-02A1	5557-02R	5556T	MOLEX
	Motor connection	5569-08A1	5557-08R	5556T	MOLEX

■Protection

Protection function	Protection		Alarm Release
	Setting	Operation	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stepped and "ALARM" outputs "L"	Cool down the driver fully, and input "L" into "ALARM RST" until "ALARM OUT" changes to "H". Or disconnect power supply for more than 1 minute.


Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.

■Motor/Driver/Cable/ model code table Unit: mm (inch)

		Motor driver set model code	Motor model code	Driver model code	Power supply cable model code	I/O Cable model code
FHD series	Palm mini PLUS / J-Book driver	FHD6P20S-D3	FH6S20-D3	FHD620PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P20PF-D3	FH6PF20N-D3	FHD620PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P40S-D3	FH6S40-D3	FHD640PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P40PE-D3	FH6PE40N-D3	FHD640PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6J60S-D5	FH6S60J-D5	FHD660JD5	FED-CNSL03 300 (11.8)	FED-CNIL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNIL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNIL10 1000 (39.4)
		FHD6J60PE-D5	FH6PE60J-D5	FHD660JD5	FED-CNSL03 300 (11.8)	FED-CNIL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNIL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNIL10 1000 (39.4)

NOTE) Cable types for FHD series are the same as FED series, because they are used in commonly.

High power simple type

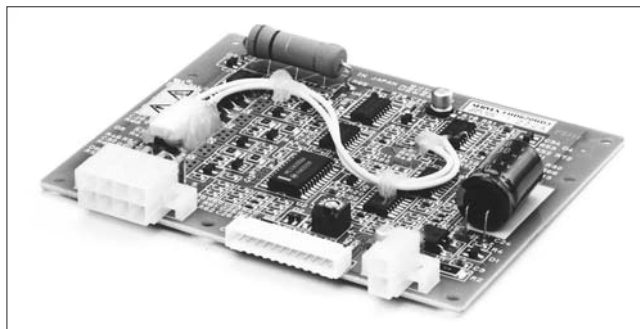


■Specification


Model on motor		Plain shaft type	FH6S20H-D3		FH6S40H-D3	
		Pinion shaft type	FH6PF20H-D3		FH6PE40H-D3	
Model on driver			FHD620HD3		FHD640HD3	
Rated voltage		V (DC)	24		24	
Rated output		W	20		40	
Speed control range		r/min	200~2500		200~2500	
Rated torque		mN • m	98		200	
		oz • in	14		28	
MAX. instantaneous torque (in 5sec.)		mN • m	150 (2000r/min MAX.)		290 (500r/min MAX.)	
		oz • in	21 (2000r/min MAX.)		42 (500r/min MAX.)	
Rated speed		r/min	2000		2000	
Speed setting method			①Speed setting by external speed setter (Sold separately: model code Q-R10KB)			
			②Speed setting by external voltage supply 0~10V			
Speed setting		(r/min)/V	300±5%			
Speed variation			Against load	±1%	0~rated torque at rated voltage and speed	
			Against voltage	±1%	Rated voltage ±10% at rated speed, no load	
			Against temperature	±3%	20±20°C at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN, ALARM RST H: Open collector L: GND (0~0.8V)			
		Output	ALARM, HU OUT, HV OUT Open collector output DC30V MAX. 10mA MAX.			
Speed pulse		Pulse/Revolution	7		7	
Current	Rated (Ave.)		1.8 MAX.		3.1 MAX.	
	MAX. (Peak)		7 MAX.		10 MAX.	
Protection functions			Over load protection When an exceeding torque than rated is applied to motor for more than about 5 sec., Stop motor and outputs "L" from "ALARM" (20W, 40W) "ALARM OUT". To release alarm: Input "L" in the ALARM RST or Turn off the power supply more than 1 min. period.			
Others			Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) (Between case and coil by DC500V tester)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 200r/min	at 2000r/min	6H□EBN		8F□EBN	
			mN • m	oz • in	mN • m	oz • in
5	40	400	390	56	780	110
10	20	200	780	110	1600	220
25 (25.44)	8	80	1700	240	3600	510
50 (49.6)	4	40	3500	500	7000	990

- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.
- □: rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in () should be used as gear ratio.

Torque Speed/Current (TYP.) Characteristics FH6S(PF)20H-D3+FHD620HD3

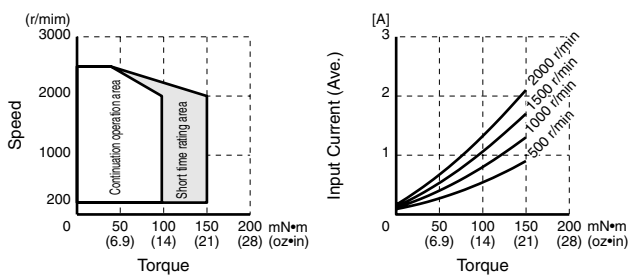


FH6S(PE)40H-D3+FHD640HD3

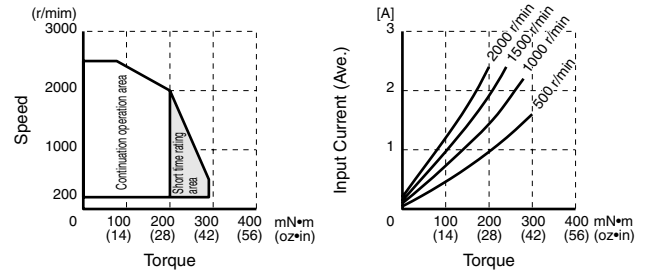

Input & output terminals and wiring diagram



Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24 V \pm 10%
	2	Black	P.GND	—	Power supply GND for driver	
I/O	1	Brown	HU OUT	Output	7 Pulse/Revolution ※1	H: Open collector DC30V MAX. L: 0~0.8 V, 10 mA MAX.
	2	Red	HV OUT	Output		
	3	Orange	ALARM OUT	Output	H: Normal operation L: Alarm output	
	4	Yellow	VR	Output	Power supply positive for external speed setter	
	5	Green	VS	Input	Speed setting signal positive	0~10 V
	6	Blue	GND	—	Speed setting signal GND	
	7	Purple	GND	—	GND for I/O Signal	
	8	Gray	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	H: Open collector L: 0~0.8 V
	9	White	BRAKE ※2	Input	H: BRAKE Deactivated L: BRAKE activated	
	10	Black	RUN	Input	H: Stop L: Start	
	11	Brown	ALARM RST ※3	Input	H: Normal operation L: Reset	
	12	Red	N.C.	—	Not used	Must be operated in the open state.

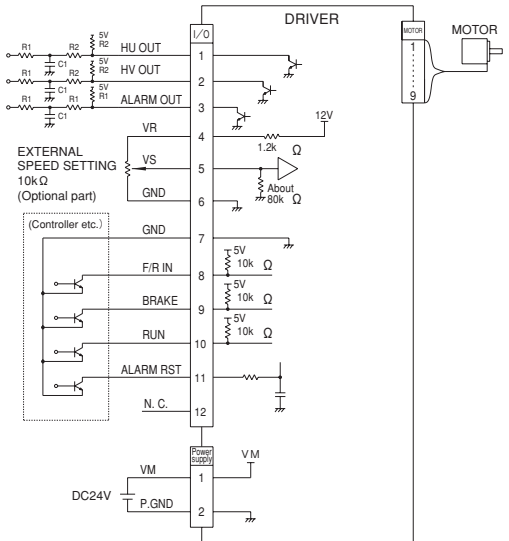

Part name	Recommended value
R1	4.7K Ω
R2	1K Ω
C1	0.01 μ F

*1 "HU OUT" signal and "HV OUT" signal are shown below.

Motor rotation (viewed from motor output shaft side)



T: Time (vary by its speed)

- ※ 2 • Brake specification: Short brake between terminals
• "BRAKE" has priority over "RUN".
• During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.


- ※ 3 In case of "L", the overload protection function is canceled. If overload operation is performed in this state, the motor may burn out.

Protection

Protection function	Protection		Alarm Release
	Setting	Operation	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stepped and "ALARM" outputs "L"	Cool down the driver fully, and input "L" into "ALARM RST" until "ALARM OUT" changes to "H". Or disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use. When the overload protection function is canceled ("ALARM RST" is in the "L" state) and temperature rises rapidly due to motor restraint, the motor may burn out. Make sure to set "ALARM RST" to "H" before operating the motor.

Control sequence

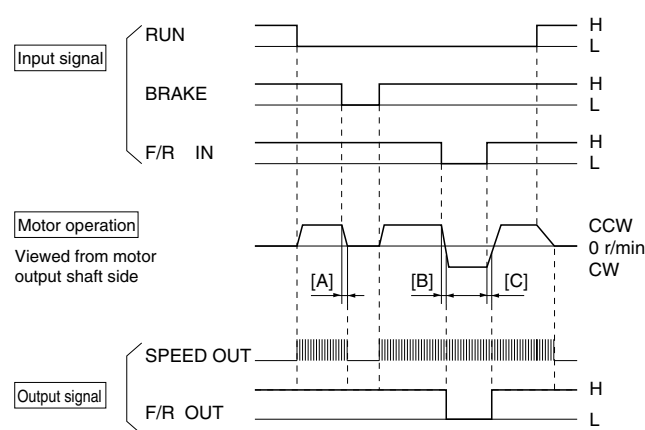

[Notes for BRAKE Operation & Rotation change]

- (1) Do not change (period [A] left) the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.
- (2) During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same,
- (3) When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H"→"L") must not be made.
- (4) During the brake is operating, set the "RUN" signal at "L" all the time.

WARNING:

In case of different way of use from (1), (2), (3) and (4), (1), (2), and (4) may be the cause of the incorrect operation and (3) may be the cause of the fire or the breakdown.

Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)

[Notes on "F/R OUT"] (20,40W only)

During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0~5pulses of "SPEED OUT" from the motor rotation switched.

Speed setting

Fig.1 Speed setting by external speed setter



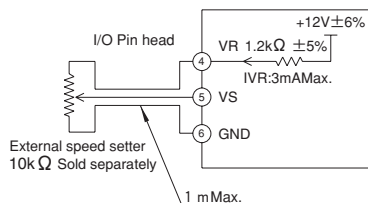



Fig.2 Speed setting by external voltage supply




Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[kΩ] as an external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

Driver outline Unit: mm (inch)

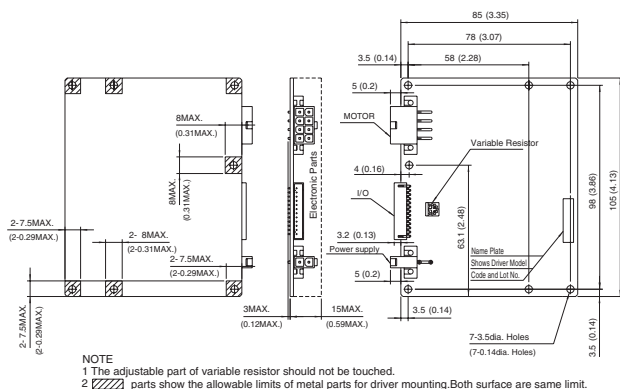

Accessory Unit: mm (inch)

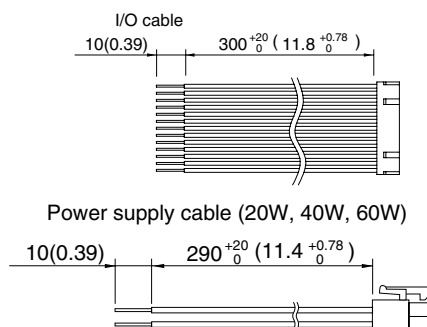

Connector model code

Item	Pin head model code on drive	Connector model code on cable		Maker
		Housing	Contact (chained)	
I/O connection	53325-1210	51090-1200	50212-8000	MOLEX
Power supply connection	5566-02A	5557-02R	5556T	
Motor connection	5569-08A1	5557-08R	5556T	

BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

In this series, motors and drivers are sold separately.
Please indicate the model type of each product.

FYD Series DC24V

■Distinguishing Features

1. Motors are designed in flat shape and in light weight
 - A special magnetic circuit design was employed newly.
By this design, these motors are in flat shape, and in lighter weight than conventional standard AC motors.
 - This series have 61mm sq. (2.4 in sq.), 80 mm sq.(3.1 in sq.), 90 mm sq. (3.5 in sq.) Flange sizes.
2. Compact designed Driver
 - "Palm Mini PLUS" Type is the smallest. (for 6W - 40W)
 - "Simple" Type is a driver of components mounted on a PCB. (for 6W - 15W)
 - "High power Simple" Type Low-cost circuit-board type driver. (25W, 40W)
3. Wide Ranged Speed Control
 - Wide range (200r/min - 2500r/min), stepless speed control.
 - "High power Simple" Type. (200r/min - 2000r/min)
 - Very steady characteristics (Feed back control employed).
4. Speed pulse output
 - Speed pulse output can be used for speed monitoring, simplified position control...
 - "Palm Mini PLUS" Type: 30ppr
 - "Simple" "High power Simple" Type: 5ppr dual signal (120° phase difference)
5. Direction of rotation signal output
 - Direction of rotation can be monitored by this signal. ("Simple" type needs an external circuit.)
6. Alarming
 - At an over-load condition, the motor stops and an alarm signal is output.
7. Gear Head
 - Low-cost gear head for FY series is also available.
8. Rotor Cover (option) available
An aluminum heat sink (size: 200mm x 200mm, thickness: 2mm or more) is required.



■Model Code

Model on motor

FY 8 PF 25 H - D3
① ② ③ ④ ⑤ ⑥

①Series name

②Motor flange dimensions
6: 61×61mm (2.4×2.4 in.)
8: 80×80mm (3.1×3.1 in.)
9: 90×90mm (3.5×3.5 in.)

③Motor output shaft type
S: Plain shaft
PF: Pinion shaft

④Motor output

6: 6W
15: 15W
25: 25W
40: 40W

⑤Driver type

N: Normal
H: High power simple type driver
⑥Power supply voltage
D3: DC24V

Model on driver

FYD 8 25 H D3
① ② ③ ④ ⑤

①Series name

②Adapting motor flange dimensions
6: 61×61mm (2.4×2.4 in.)
8: 80×80mm (3.1×3.1 in.)
9: 90×90mm (3.5×3.5 in.)

③Motor output
6: 6W
15: 15W
25: 25W
40: 40W

④Driver type

P: Palm mini PLUS type driver
S: Simple type driver
H: High power simple type driver
⑤Power supply voltage
D3: DC24V

Palm mini PLUS type



■Specification

Model on motor		Plain shaft type	FY6S6-D3		FY8S15-D3		FY8S25-D3		FY9S40-D3		
		Pinion shaft type	FY6PF6N-D3		FY8PF15N-D3		FY8PF25N-D3		FY9PF40N-D3		
Model on driver			FYD66PD3		FYD815PD3		FYD825PD3		FYD940PD3		
Rated voltage		V (DC)		24		24		24		24	
Rated output		W		6		15		25		40	
Speed control range		r/min		200~2500		200~2500		200~2300		200~2000	
Rated torque		mN・m		39		98		157		250	
		oz・in		5.6		14		22		36	
MAX. instantaneous torque 5sec		mN・m		59 (1500r/min MAX.)		150 (1500r/min MAX.)		200 (1500r/min MAX.)		300 (600r/min MAX.)	
		oz・in		8.3 (1500r/min MAX.)		21 (1500r/min MAX.)		28 (1500r/min MAX.)		43 (600r/min MAX.)	
Rated speed		r/min		1500		1500		1500		1500	
Speed setting method			①Speed setting by external speed setter (Sold separately: model code Q-R10KB)								
			②Speed setting by external voltage supply 0~10V								
Speed setting		(r/min)/V		300±5%							
Speed variation			Against load		±1%		0~rated torque at rated voltage and speed				
			Against voltage		±1%		DC24V±10% at rated speed, no load				
			Against temperature		±3%		20±20℃ at rated voltage and speed, no load				
Input and output signal		Input		RUN, BRAKE, F/R IN H: Open collector L: GND (0~0.8V)							
		Output		ALARM, SPEED OUT (PULSE OUTPUT), F/R OUT Open collector output DC30V MAX. 10mA MAX.							
Speed pulse		Pulse/Revolution		30		30		30		30	
Current	Rated (Ave.)		A	0.7 MAX.		1.4 MAX.		2.3 MAX.		3.4 MAX.	
	MAX. (Peak)			4.2 MAX.		6.6 MAX.		10 MAX.		10 MAX.	
Protection functions			Over load protection When an exceeding torque than rated is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM".In disconnect power supply for more than 1min, In case of alarm release.								
Others			Operation temperature 0~40℃ (no condensation) continuous duty. The motor flange surface temp must be 80℃ MAX. (Ambient temperature 40℃ without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester)								
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads								
	at 200r/min	at 1500r/min	6H□FBN-100		8H□FBN-100		8H□FBN-100		9H□FBN-100		
			mN・m	oz・in	mN・m	oz・in	mN・m	oz・in	mN・m	oz・in	
5	40	300	160	22	390	56	640	83	1000	142	
15	14	100	470	67	1200	170	1900	260	3100	431	
25	8	60	720	100	1800	250	2800	400	4600	650	
30	6.7	50	850	120	2100	290	3400	490	5600	793	
50	4	30	1400	190	3100	440	5100	720	8300	1200	


- : rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

FYD Series DC24V


■Torque-speed/Current (TYP.) characteristics

(FY6S6-D3+FYD66PD3)

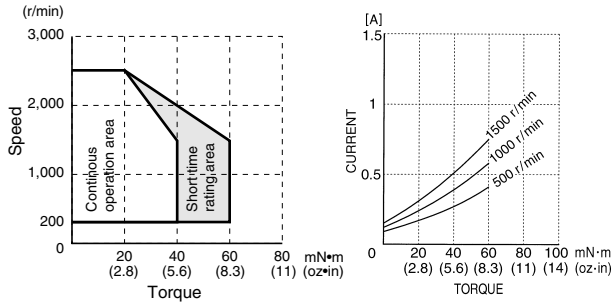


■Motor outlines (Plain shaft type) Unit: mm (inch)


FY6S6-D3

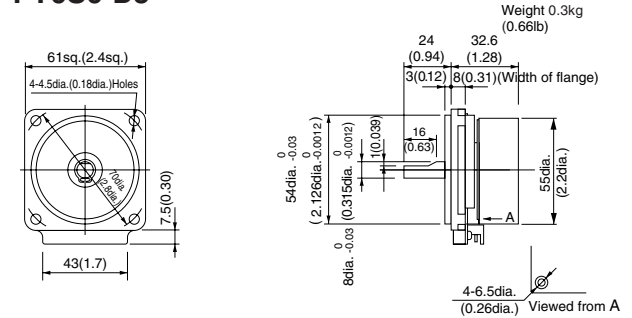


(FY8S15-D3+FYD815PD3)

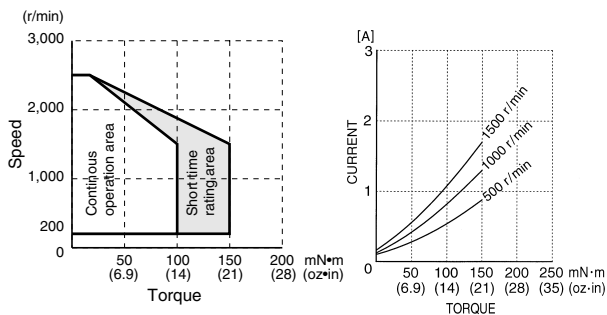


FY8S15-D3

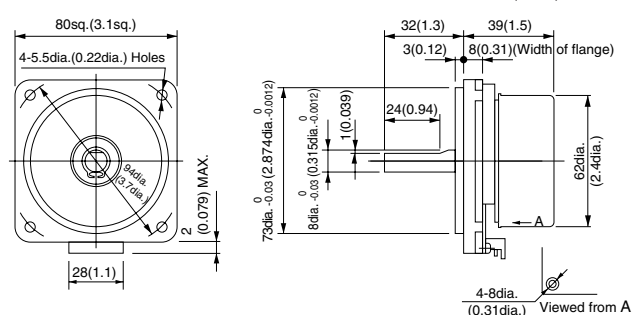


(FY8S25-D3+FYD825PD3)

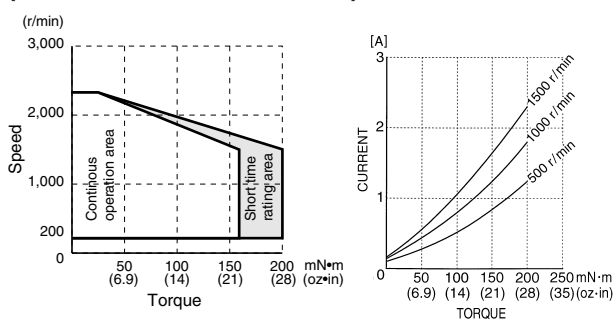


FY8S25-D3

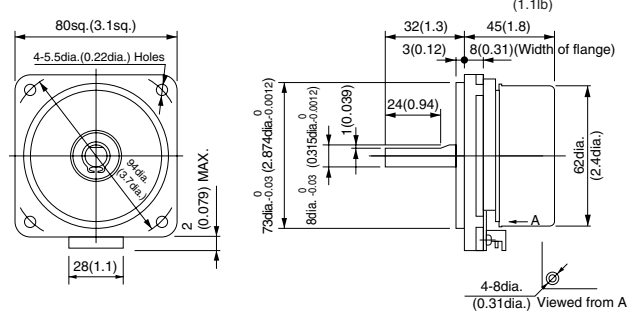

(FY9S40-D3+FYD940PD3)

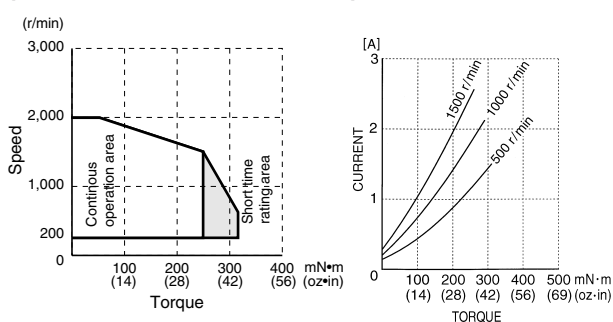


FY9S40-D3

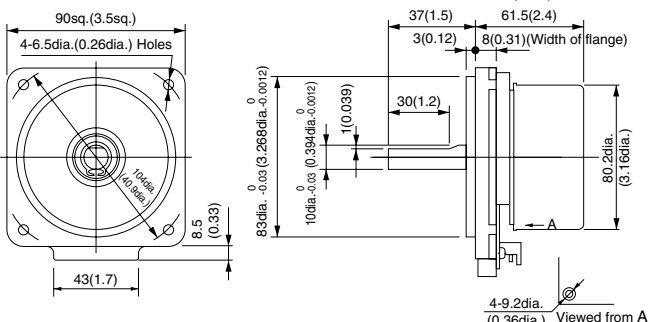

Motor (Pinion shaft type) + Gear head outlines

Unit: mm (inch)


FY6PF6N-D3+6H □ FBN-100

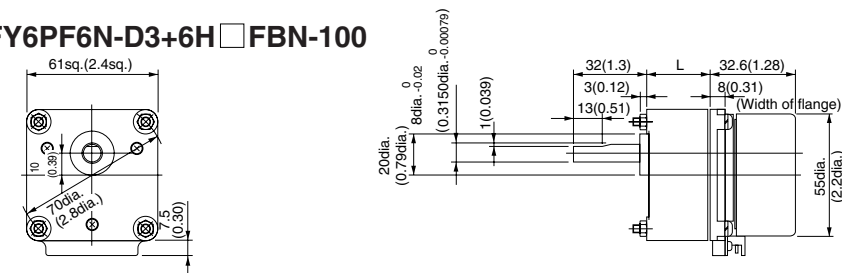

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	32(1.3)	0.4(0.88)	M4X50(2.0)
1/25~1/50	42(1.7)	0.4(0.88)	M4X60(2.4)


FY8PF15N-D3+8H □ FBN-100

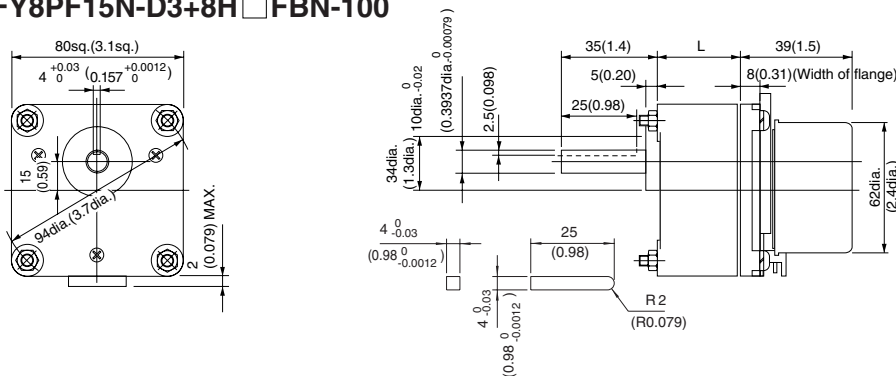

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)


FY8PF25N-D3+8H □ FBN-100

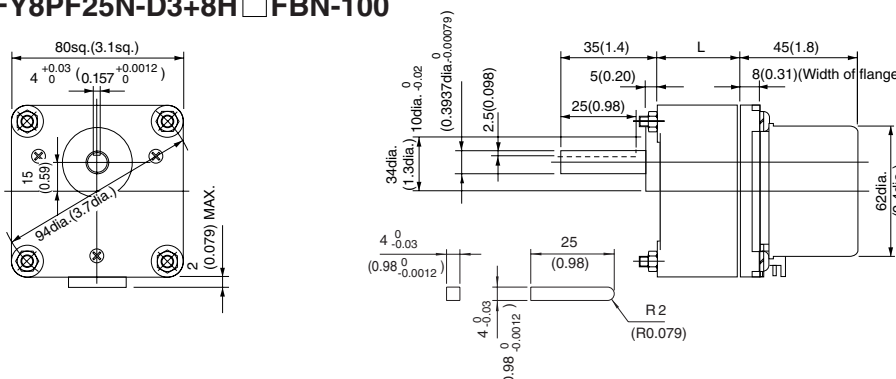

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

FY9PF40N-D3+9H □ FBN-100

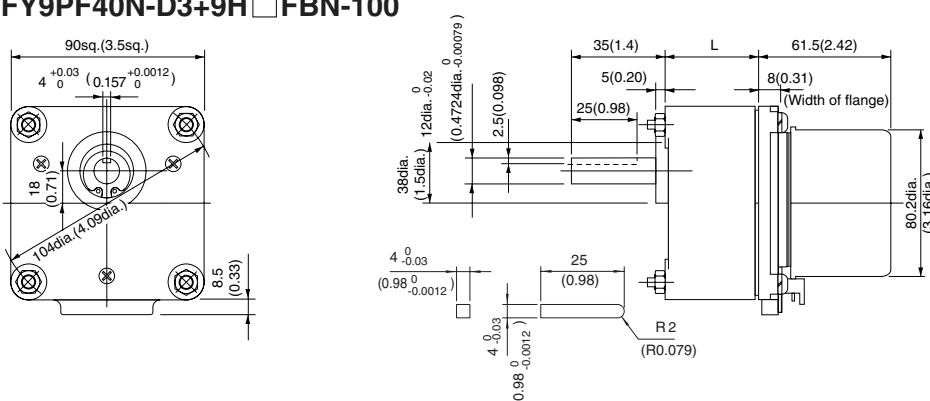

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	42(1.7)	0.8(1.8)	M6X50(2.4)
1/25~1/50	60(2.4)	0.9(2.0)	M6X60(3.1)

NOTE

Rubber gaskets for insertion between gear head are sold separately to motor prevent oil leakage.

Model on rubber gasket


6H □ FBN: H6packing (rubber)

8H □ FBN: H8packing (rubber)


9H □ FBN: H9packing (rubber)

Input & output terminals and wiring diagram

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC24V±10%
	2	P.GND	—	Power supply GND for driver	
I/O	1	SPEED OUT	Output	30 Pulse/Revolution *3	*1 H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	3	VR	Output	Power supply positive for external speed setter	0~10V
	4	VS	Input	Speed setting signal positive	
	5	GND	—	Speed setting signal GND	
	6	GND	—	GND for I/O Signal	
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	Same as *1
	8	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	*2 H: Open collector L: 0~0.8V
	9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V During the operation of "BRAKE", "RUN" signal be "L".
	10	RUN	Input	H: Stop L: Start	Same as *2

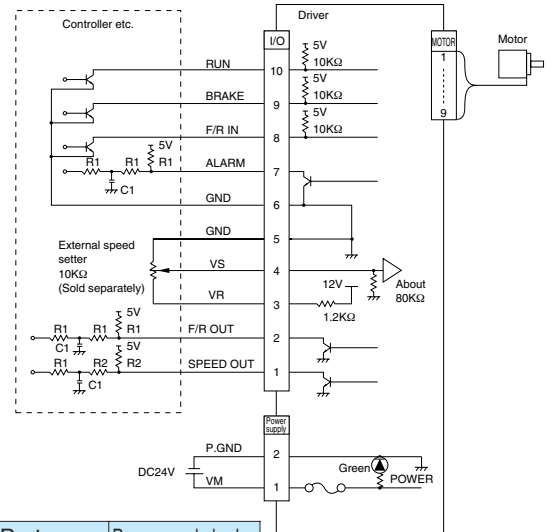


*3 "SPEED OUT" signal is shown below.



When input signal is H, input signals (RUN, BRAKE, F/R IN) should be input by open collector. If 5V is input, it will become the cause of wrong operation. Noise of output signals (ALARM, F/R OUT, SPEED OUT) should be removed by a filter as shown in figure above. Setting of filter constant should be done by confirming the noise level referring to the recommended constant. At this time, be careful that signal delays if the values of resistance and/or capacitor are big though it becomes better to kill noise. Specially, for speed out, setting should be done with attention to filter constant because pulse width is narrow.

Control sequence

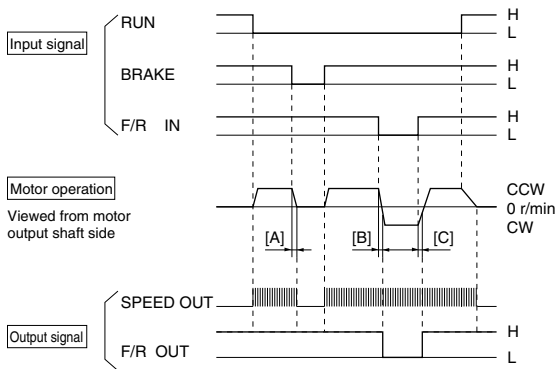

[Notes for BRAKE Operation & Rotation change]

- (1) Do not change the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.
- (2) During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same,
- (3) When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H"→"L") must not be made.
- (4) During the brake is operating set the "RUN" signal at "L" all the time.

WARNING:

Notes above must be following without fail, and reminded all the time. But if not follow to (1), (2) & (4), it may cause abnormal/dangerous motor operation, and not follow to (3), it may cause FIRE or system damage.

Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)

[Notes on "F/R OUT"]

During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0~5pulses of "SPEED OUT" from the motor rotation switched.

Speed setting

Fig.1 Speed setting by external speed setter



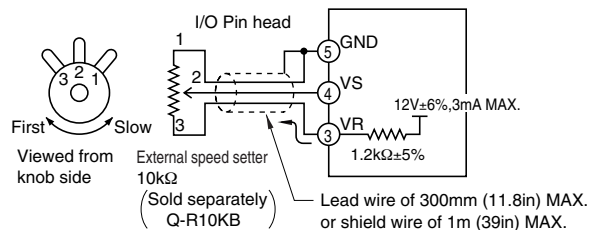


Fig.2 Speed setting by external voltage supply

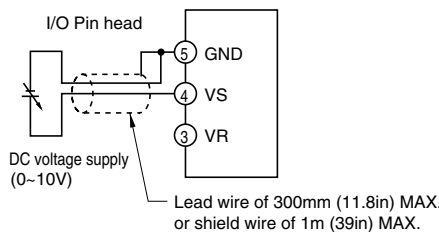

Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

■ Protection


Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L."	Motor is stopped, and "ALARM" outputs "L".	Disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.


■ Driver outline

Unit: mm (inch)

**FYD66PD3, FYD815PD3,
FYD825PD3, FYD940PD3**

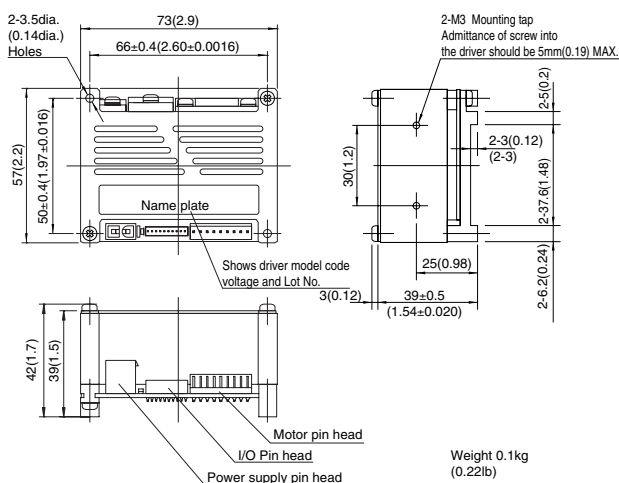

■ Rotor cover (Sold separately)

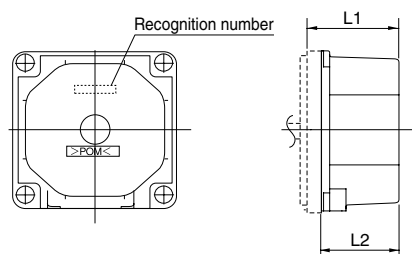


Model on rotor cover	L1mm (in)	L2mm (in)	Recognition number	Accessory washer nominal diameter	Adapting motor	
F-RC630	37 (1.5)	30.4 (1.20)	AD09877	M4	6W	Plain shaft type FY6S6-D3
						Pinion shaft type FY6PF6N-D3
F-RC837	43.5 (1.71)	37 (1.5)	AD09768	M5	15W	Plain shaft type FY8S15-D3
						Pinion shaft type FY8PF15N-D3
F-RC844	50 (2.0)	43.5 (1.71)	AD09904	M5	25W	Plain shaft type FY8S25-D3
						Pinion shaft type FY8PF25N-D3
F-RC961	67.5 (2.66)	61 (2.40)	AD09903	M6	40W	Plain shaft type FY9S40-D3
						Pinion shaft type FY9PF40N-D3

■Connector model code


Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	IL-Y-10P-S15T2-EF	IL-Y-10S-S15C3	IL-Y-C3-A-10000	JAE
Power supply connection	Driver	5566-02A	5557-02R	5556T	MOLEX
Motor connection	Driver	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	

■ Accessory Unit: mm (inch)

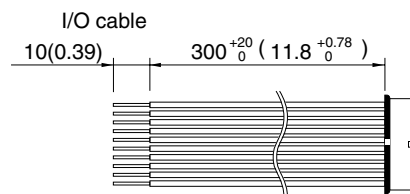

Connection guide


Pin No.	Name	Lead wire color	Lead wire
1	SPEED OUT	Brown	UL3265 AWG28
2	F/R OUT	Red	
3	VR	Orange	
4	VS	Yellow	
5	GND	Green	
6	GND	Blue	
7	ALARM	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	

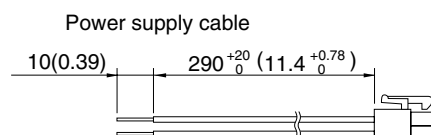

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430
2	P. GND	Black	AWG22

Motor cable

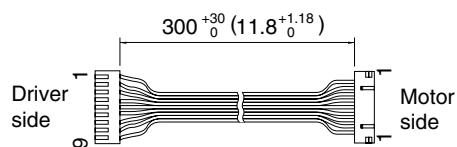

Connection guide


Motor side connector Pin No.	Driver side connector Pin No.	Name	Lead wire color	Lead wire
1	1	Coil U	Brown	UL1007 AWG24
2	—	—	—	—
3	2	Coil V	Red	UL1007 AWG24
4	—	—	—	—
5	3	Coil W	Orange	UL1007 AWG24
6	4	—	Yellow	
7	5	HW	Green	
8	6	HV	Blue	
9	7	HU	Purple	
10	8	GND	Gray	
11	9	12V	White	

■Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

		Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
FYD series	Palm mini PLUS driver	FY6S6-D3	FYD66PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC630
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY6PF6N-D3	FYD66PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC630
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8S15-D3	FYD815PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC837
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8PF15N-D3	FYD815PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC837
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8S25-D3	FYD825PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8PF25N-D3	FYD825PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY9S40-D3	FYD940PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY9PF40N-D3	FYD940PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	

NOTE)Cable types for FYD series are the same as FED series, because they are used in commonly.

Simple type

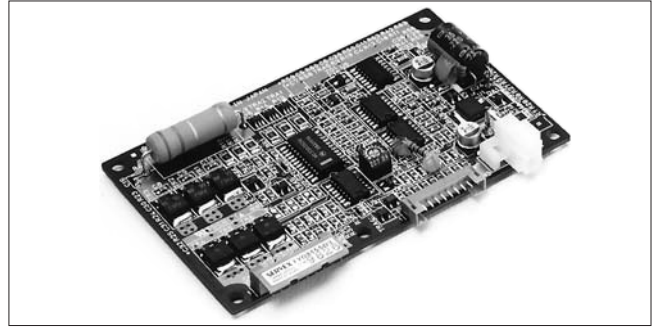

■Specification

Model on motor		Plain shaft type	FY6S6-D3		FY8S15-D3	
		Pinion shaft type	FY6PF6N-D3		FY8PF15N-D3	
Model on driver			FYD66SD3		FYD815SD3	
Rated voltage		V (DC)	24		24	
Rated output		W	6		15	
Speed range		r/min	200~2500		200~2500	
Rated torque		mN・m	39		98	
		oz・in	5.6		14	
Rated speed		r/min	1500		1500	
Speed setting method			①Speed setting by external speed setter (Sold separately: Model code Q-R10KB)			
			②Speed setting by external voltage supply 0~10V			
Speed setting		(r/min)/V	300±5%			
Speed variation			Against load	±1%	0~rated torque at rated voltage and speed	
			Against voltage	±1%	DC24V±10% at rated speed, no load	
			Against temperature	±3%	20±20℃ at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN H: Open collector L: GND (0~0.8V)			
		Output	ALARM OUT, HU OUT, HV OUT Open collector output DC30V MAX. 10mA MAX.			
Speed pulse		Pulse/Revolution	5		5	
Current	Rated (Ave.)		0.7 MAX.		1.4 MAX.	
	MAX. (Peak)					
			2.8 MAX.		5 MAX.	
Protection functions			Over load protection When a load exceeding rated torque is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM" In case of alarm release, disconnect power supply for more than 1min.			
Others			Operation temperature 0~40℃ (no condensation) continuous duty. The motor flange surface tempo must be 80℃ MAX. (Ambient temperature 40℃ without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz(Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester.)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 200r/min	at 1500r/min	6H□FBN-100		8H□FBN-100	
			mN・m	oz・In	mN・m	oz・In
5	40	300	160	22	390	56
15	14	100	470	67	1200	170
25	8	60	720	100	1800	250
30	6.7	50	850	120	2100	290
50	4	30	1400	190	3100	440


- □: rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS


FYD Series DC24V

■ Torque-speed/Current (TYP.) characteristics

(FY6S6-D3+FYD66SD3)

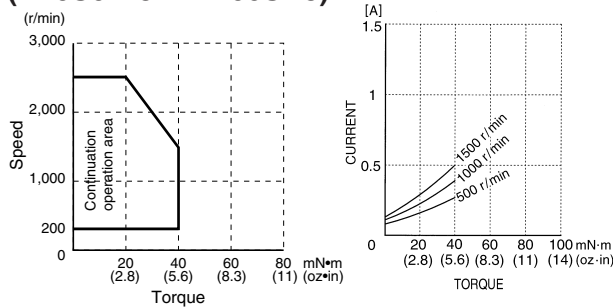


(FY8S15-D3+FYD815SD3)

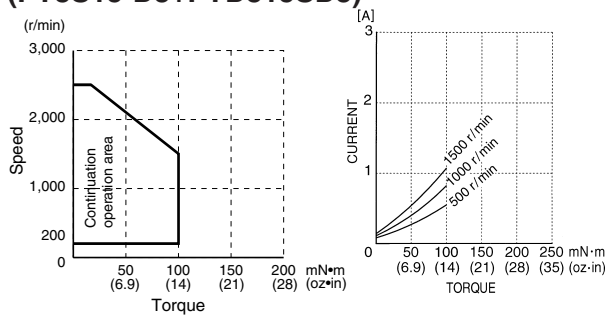


■ Motor outlines (Plain shaft type)

Unit: mm (inch)

FY6S6-D3

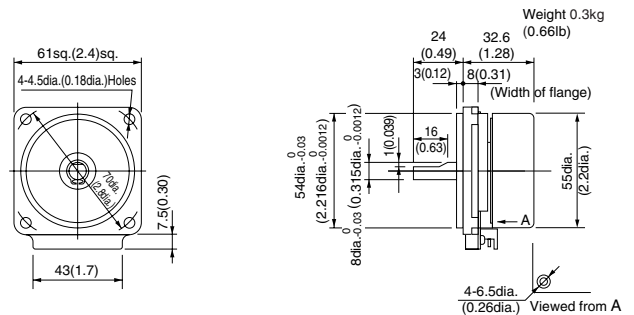


FY8S15-D3

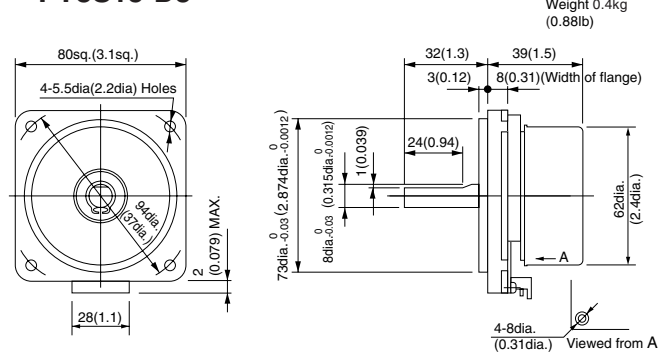

■ Motor (Pinion shaft type) + gearhead outlines


FY6PF6N-D3+6H □ FBN-100

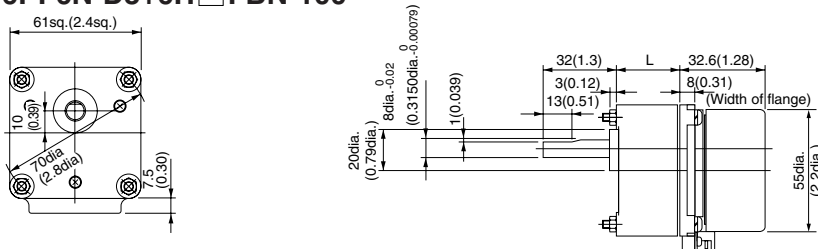

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	L mm(In.)	Weight Kg(lb)	Screw
1/5~1/15	32(1.3)	0.4(0.88)	M4X50(2.0)
1/25~1/50	42(1.7)	0.4(0.88)	M4X60(2.4)

FY8PF15N-D3+8H □ FBN-100

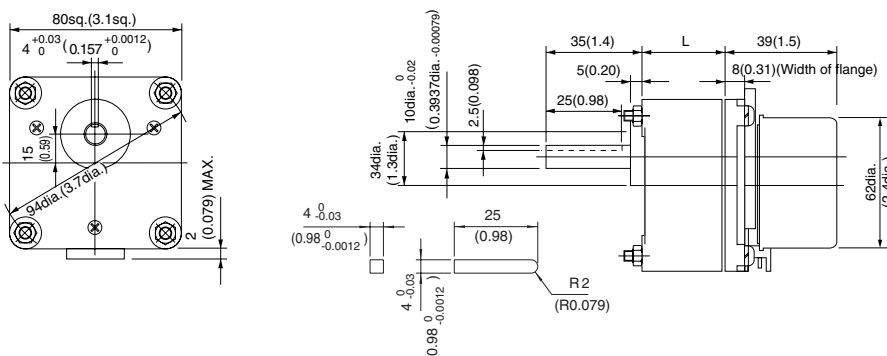


L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	L mm(In.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

Input & output terminals and wiring diagram

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power Supply	1	VM	Input	Power supply positive for drive	DC24V±10%
	2	P.GND	—	Power supply GND for driver	
I/O	1	HU OUT	Output	5 pulse/revolution (Hall signal) *1	H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	HV OUT	Output		
	3	ALARM OUT	Output	H: Normal operation L: Alarm output	
	4	VR	Output	Power supply positive for external speed setter	0~10V
	5	VS	Input	Speed setting signal positive	
	6	GND	—	Speed setting signal GND	
	7	GND	—	GND for I/O signal	H: CCW L: CW (Viewed from motor output shaft side)
	8	F/R IN	Input		
	9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	
	10	RUN	Input	H: Stop L: Start	H: Open collector L: 0~0.8V

*1 "HU OUT" signal and "HV OUT" signal are shown below.
Motor rotation (viewed from motor output shaft side)

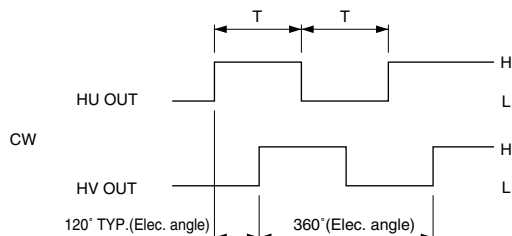

Protection

Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stopped, and "ALARM" outputs "L".	Disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.

Speed setting

Fig.1 Speed setting by external speed setter



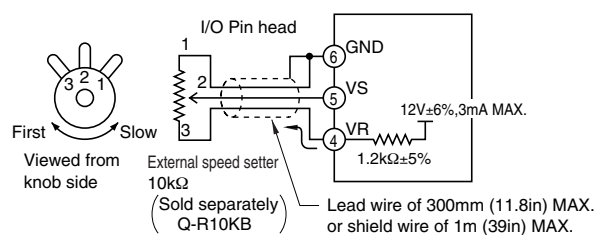


Fig.2 Speed setting by external voltage supply

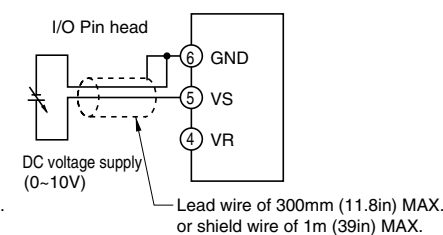


Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[kΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

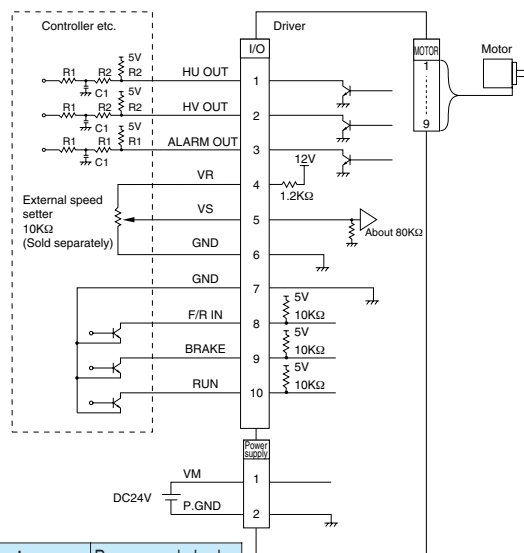


Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

When input signal is H, input signals (RUN, BRAKE, F/R IN) should be input by open collector.
If 5V is input, it will become the cause of wrong operation.
Noise of output signals (ALARM OUT, HU OUT, HV OUT) should be removed by a filter as shown in fig.
Setting of filter constant should be done by confirming the noise level referring to the recommended constant.
At this time, be careful that signal delays if the values of resistance and/or capacitor are big though it becomes better to kill noise.
Specially, for HU OUT, HV OUT, setting should be done with attention to filter constant because pulse width is narrow.

Control sequence

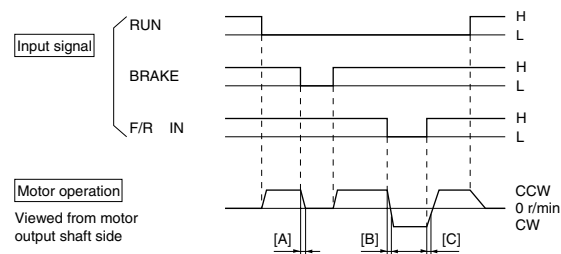


[Notes for "BRAKE" operation and during the rotation direction changing]
"BRAKE" (Above [A] period) should be operated, within the "SPEED CONTROL RANGE".
If it is used differently from above, it may cause fire or failure. Also, be careful that "VM" terminal voltage happens to rise up to about 30V according to the condition of use during the rotation direction changing (Above [B] and [C] periods). (Brake operation: Strong brake.)



By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

■Driver outline Unit: mm (inch)


FYD66SD3, FYD815SD3

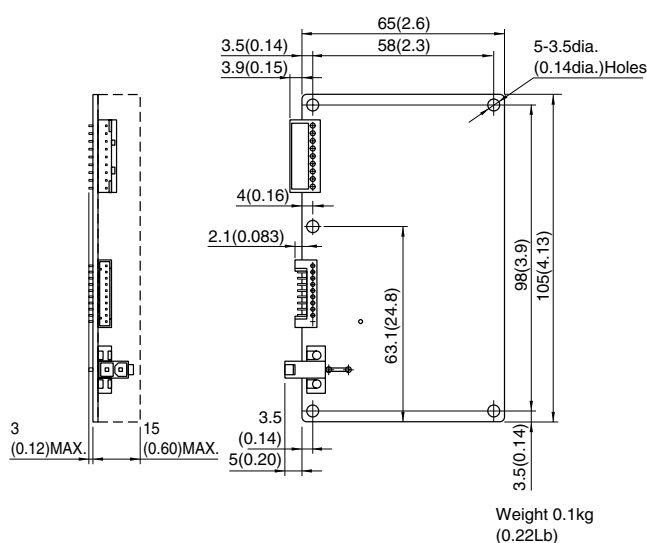

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	HU OUT	Brown	UL3265 AWG28
2	HV OUT	Red	
3	ALARM OUT	Orange	
4	VR	Yellow	
5	VS	Green	
6	GND	Blue	
7	GND	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	

■Accessory Unit: mm (inch)

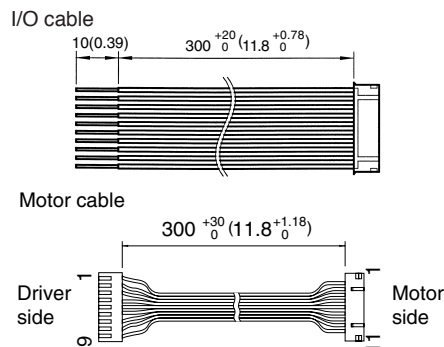

Connection guide

Motor side connector Pin No.	Driver side connector Pin No.	Name	Lead wire color	Lead wire
1	1	Coil U	Brown	UL1007 AWG24
2	—	—	—	—
3	2	Coil V	Red	UL1007 AWG24
4	—	—	—	—
5	3	Coil W	Orange	UL1007 AWG24
6	4	—	Yellow	
7	5	HW	Green	
8	6	HV	Blue	
9	7	HU	Purple	
10	8	GND	Gray	
11	9	12V	White	

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430 AWG22
2	P. GND	Black	

■Connector model code


Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	IL-S-10P-S2L2-EF	IL-S-10S-S2C2-S	IL-S-C2-S-10000	JAE
Power supply connection	Driver	5566-02A1	5557-02R	5556T	MOLEX
Motor connection	Driver	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	

■Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

	Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
FYD series Simple driver	FY6S6-D3	FYD66SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC630
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY6PF6N-D3	FYD66SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC630
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY8S15-D3	FYD815SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC837
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY8PF15N-D3	FYD815SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC837
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	

NOTE) The power supply cable and motor cable types for FY series are the same as those for FED series.

High power simple

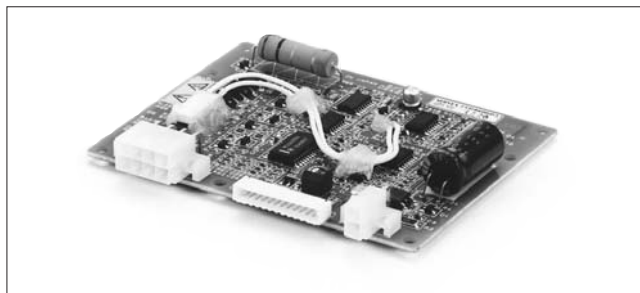


■Specification


Model on motor	plain shaft type		FY8S25H-D3		FY9S40H-D3		
	Pinion shaft type		FY8PF25H-D3		FY9PF40H-D3		
Model on driver			FYD825HD3		FYD940HD3		
Rated voltage	V (DC)		24		24		
Rated output	W		25		40		
Speed control range	r/min		200~2300		200~2000		
Rated torque	mN • m		157		250		
	oz • in		22		36		
MAX. instantaneous torque 5sec	mN • m		200 (1500r/min MAX.)		300 (600r/min MAX.)		
	oz • in		28 (1500r/min MAX.)		43 (600r/min MAX.)		
Rated speed	r/min		1500		1500		
Speed setting method			①Speed setting by external speed setter (Sold separately: model code Q-R10KB)				
			②Speed setting by external voltage supply 0~10V				
Speed setting	(r/min)/V		300±5%				
Speed variation			Against load		±1%	0~rated torque at rated voltage and speed	
			Against voltage		±1%	DC24V±10% at rated speed, no load	
			Against temperature		±3%	20±20℃ at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN, ALARM RST H: Open collector L: GND (0~0.8V)				
		Output	ALARM, HU OUT HV OUT Open collector output DC30V MAX. 10mA MAX.				
Speed pulse		Pulse/Revolution		5		5	
Current	Rated (Ave.)		A	2.3 MAX.		3.4 MAX.	
	MAX. (Peak)			10 MAX.		10 MAX.	
Protection functions			Over load protection When an exceeding torque than rated is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM".				
Others			Operation temperature 0~40℃ (no condensation) continuous duty. The motor flange surface temp must be 80℃ MAX. (Ambient temperature 40℃ without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester)				
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads				
	at 200r/min	at 1500r/min	8H□FBN-100		9H□FBN-100		
			mN • m	oz • in	mN • m	oz • in	
5	40	300	640	83	1000	140	
15	14	100	1900	260	3100	440	
25	8	60	2800	400	4600	650	
30	6.7	50	3400	490	5600	790	
50	4	30	5100	720	8300	1200	

- □: rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

■Torque-speed/Current (TYP.) characteristics (FY8S25H-D3/FY8PF25H-D3+FYD825HD3)

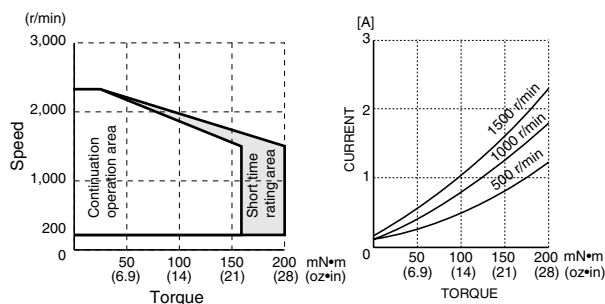


■Feature (FY9S40H-D3/FY9PF40H-D3+FYD940HD3)

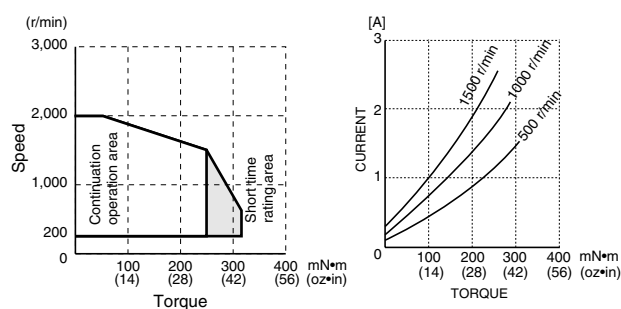


■Motor outlines (Plain shaft type) Unit: mm (inch)

FY8S25H-D3

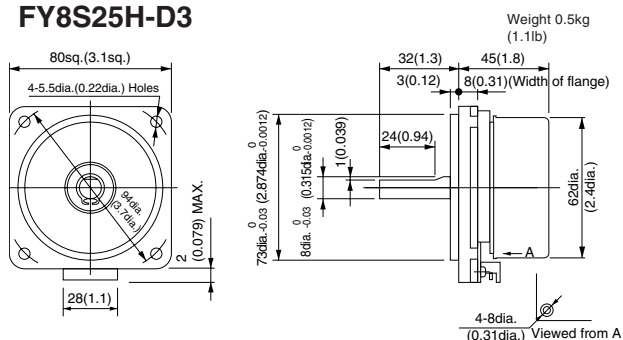


FY9S40H-D3

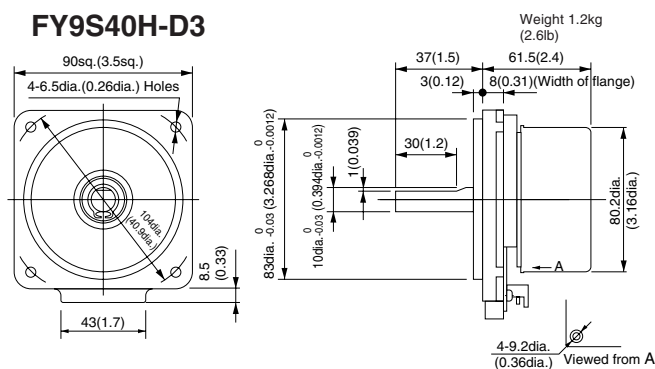

■Motor (Pinion shaft type) + Gear head outlines Unit: mm (inch)

FY8PF25H-D3+8H □ FBN-100

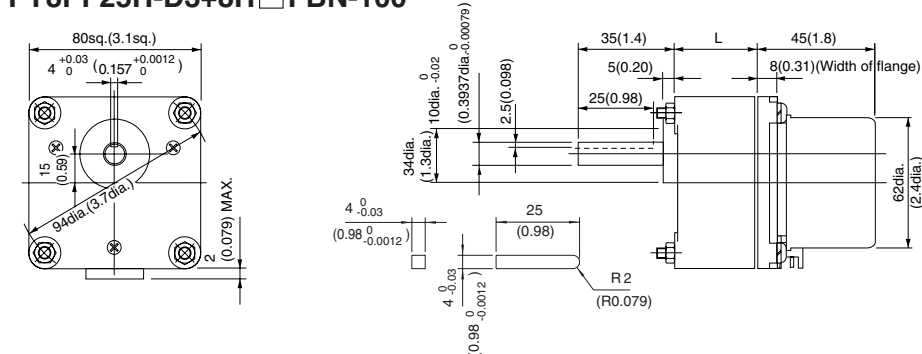

L(Gear head length)•Weight•Screw(Accessory)


Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

NOTE

Rubber gaskets for insertion between gear head are sold separately to motor prevent oil leakage.

Model on rubber gasket
8H □ FBN: H8packing (rubber)
9H □ FBN: H9packing (rubber)


■Rotor cover (Sold separately)

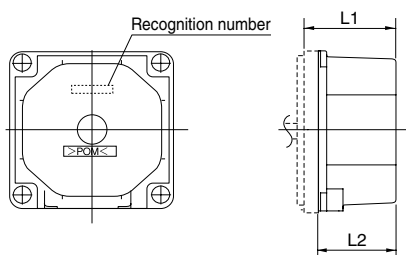

Model on rotor cover	L1mm (in)	L2mm (in)	Recognition number	Accessory washer nominal diameter	Adapting motor
F-RC844	50 (2.0)	43.5 (1.71)	AD09904	M5	25W
F-RC961	67.5 (2.66)	61 (2.40)	AD09903	M6	40W

Input & output terminals and wiring diagram



Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24V±10%
	2	Black	P.GND	—	Power supply GND for driver	
I/O	1	Brown	HU OUT	Output	5 Pulse/Revolution ※1	H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	Red	HV OUT	Output		
	3	Orange	ALARM OUT	Output	H: Normal operation L: Alarm output	
	4	Yellow	VR	Output	Power supply positive for external speed setter	
	5	Green	VS	Input	Speed setting signal positive	0~10V
	6	Blue	GND	—	Speed setting signal GND	
	7	Purple	GND	—	GND for I/O Signal	
	8	Gray	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	
	9	White	BRAKE ※2	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V
	10	Black	RUN	Input	H: Stop L: Start	
	11	Brown	ALARM RST ※3	Input	H: Normal operation L: Reset	
	12	Red	N.C.	—	Not Connected	Must be operated in the open state.

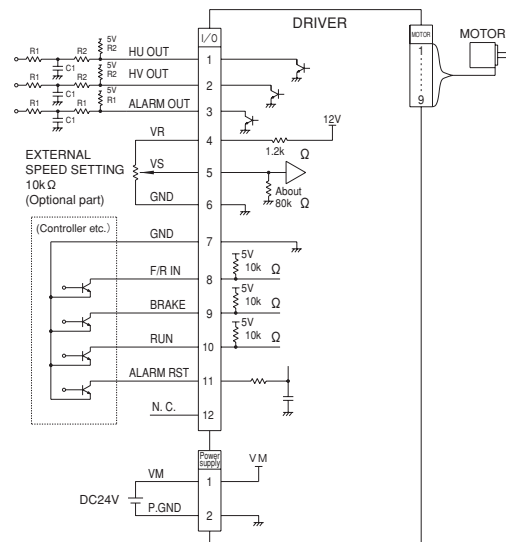

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

※1 "HU OUT" signal and "HV OUT" signal aer shown below.

Motor rotation (viewed from motor output shaft side)




T:Time(vary by its speed)

- ※2
- Brake specification: Short brake between terminals
 - "BRAKE" has priority over "RUN".
 - During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.

※3 In case of "L", the overload protection function is canceled. If overload operation is performed in this state, the motor may burn out.

Control sequence

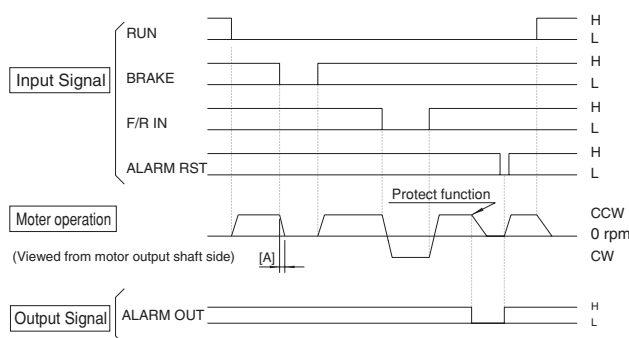

[Note for brake operation]

Perform brake operation (area [A] above) within the speed limit range. Different operation from the above may cause fire or failure.

Speed setting

Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

Protection

Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stopped, and "ALARM" outputs "L".	Cool down the driver fully, and disconnect power supply for more than 1 minute until "ALARM OUT" changes to "H".

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use. When the overload protection function is canceled ("ALARM RST" is in the "L" state) and temperature rises rapidly due to motor restraint, the motor may burn out. Make sure to set "ALARM RST" to "H" before operating the motor.

Fig.1 Speed setting by external speed setter






Fig.2 Speed setting by external voltage supply



2 parts show the allowable limits of metal parts for driver mounting. Both surface are same limit.

POWER SUPPLY CABLE

10(0.39) 290 $\begin{smallmatrix} +20 \\ 0 \end{smallmatrix}$ (11.4) $\begin{smallmatrix} +0.78 \\ 0 \end{smallmatrix}$

I/O CABLE

10(0.39) 300 $\begin{smallmatrix} +20 \\ 0 \end{smallmatrix}$ (11.8) $\begin{smallmatrix} +0.78 \\ 0 \end{smallmatrix}$

Motor CABLE

300 $\begin{smallmatrix} +30 \\ 0 \end{smallmatrix}$ (11.8) $\begin{smallmatrix} +1.18 \\ 0 \end{smallmatrix}$

Pin No.	Name	Note
1	Coil U	—
2	—	—
3	Coil V	—
4	—	—
5	Coil W	—
6	—	—
7	HW	Open collector output
8	HV	Open collector output
9	HU	Open collector output
10	GND	—
11	12V	—

Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	53325-1210	51090-1200	50212-8000	MOLEX
Power supply connection	Driver	5569-02A1	5557-02R	5556T	
Motor connection	Driver	5569-08A1	5557-08R	5556T2	
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	JAE

		Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
FVD series	High power Simple driver	FY8S25H-D3	FYD825D3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
		FY8PF25H-D3	FYD825D3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
		FY9S40H-D3	FYD940HD3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
		FY9PF40H-D3	FYD940HD3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	

29