


Options (Unit : mm)


Finger guards

Model : 109-049C Color : Nickel-chrome plating (silver)
Surface treatment : Nickel-chrome plating (silver)

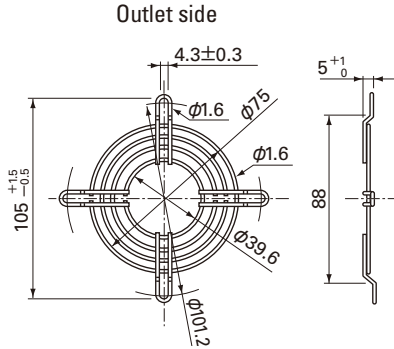


Resin finger guards

Model : 109-1002G

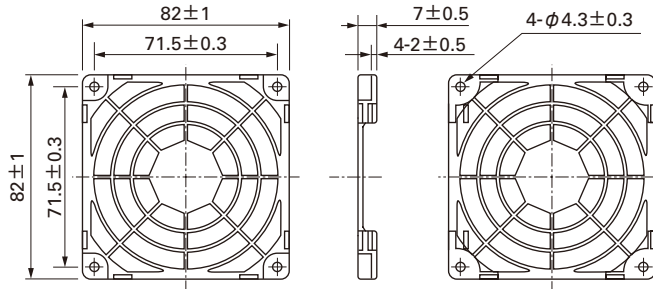


Model : 109-049E Color : Nickel-chrome plating (silver)
Surface treatment : Nickel-chrome plating (silver)
: 109-049H : Cation electropainting (black)

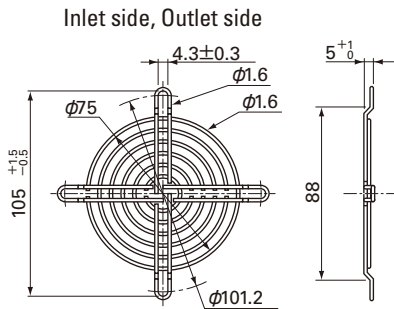


Resin filter kits

Model : 109-1002F13 (13PPI), 109-1002F20 (20PPI)
: 109-1002F30 (30PPI), 109-1002F40 (40PPI)

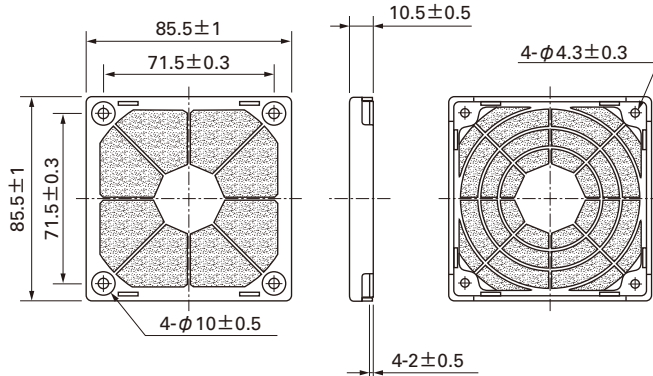


Plug cord

(Products compliant with Electrical Appliance and Material Safety Law)
Model : 489-016-L10/489-016-L21

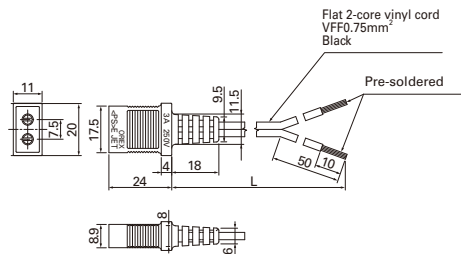


(UL/CSA CERTIFIED)
UL FILE No. E50197 CSA FILE No. LR67048
Model : 489-047-L10/489-047-L21

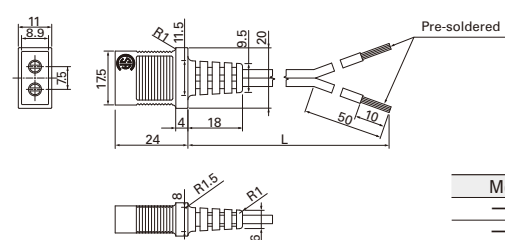


Model	Power cord length(mm)
— L10	1,000
— L21	2,100

Air Flow - Static Pressure Characteristics

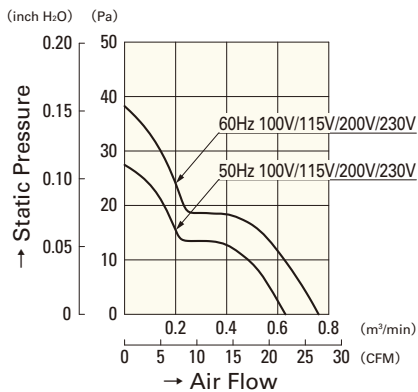

109S050
109S053
109S051
109S054

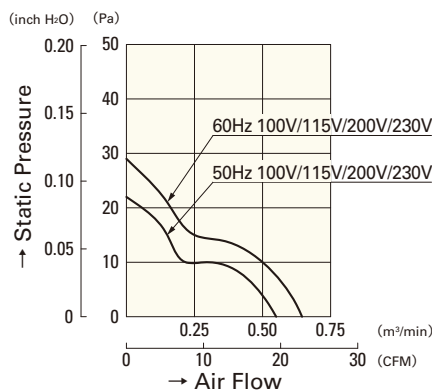

109S030
109S033
109S031
109S034