


## Options (Unit : mm)


### Finger guards

Model : 109-049C Surface treatment : Nickel-chrome plating (silver) Color

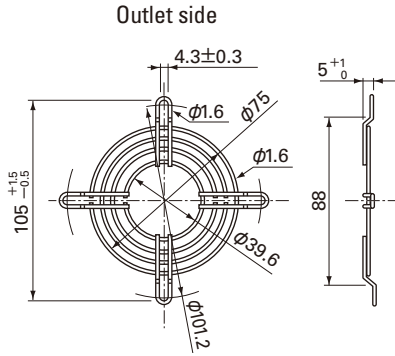


### Resin finger guards

Model : 109-1002G

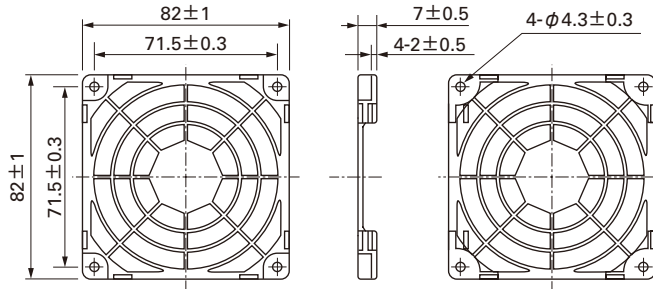


Model : 109-049E Surface treatment : Nickel-chrome plating (silver) Color  
: 109-049H : Cation electropainting (black)

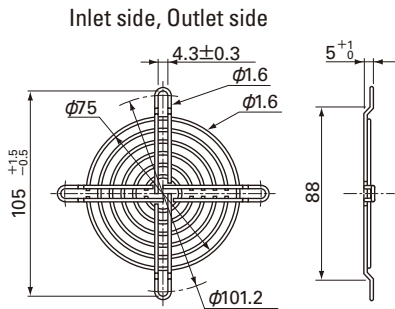

### Resin filter kits



Model : 109-1002F13 (13PPI), 109-1002F20 (20PPI)  
: 109-1002F30 (30PPI), 109-1002F40 (40PPI)

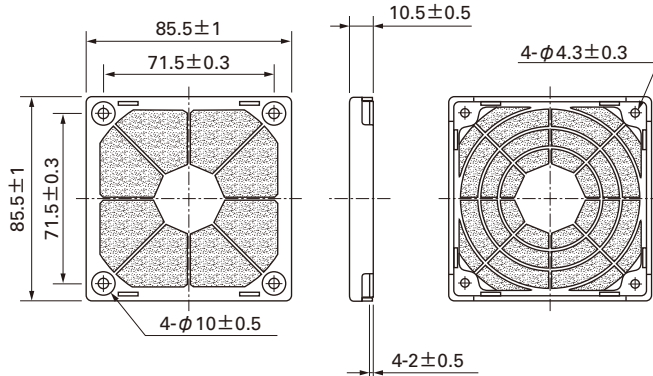

### Plug cord


(Products compliant with Electrical Appliance and Material Safety Law)  
Model : 489-016-L10/489-016-L21

(UL/CSA CERTIFIED)  
UL FILE No.E50197 CSA FILE No.LR67048  
Model : 489-047-L10/489-047-L21

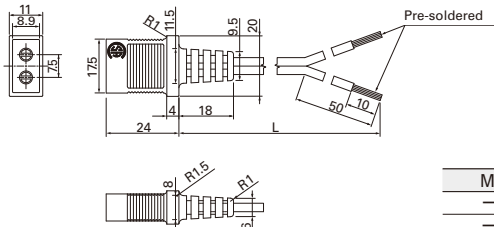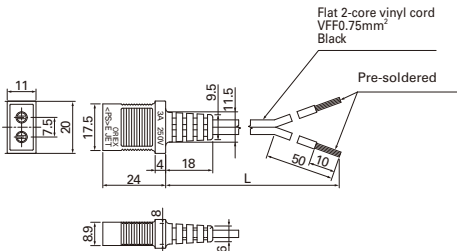

Model	Power cord length(mm)
— L10	1,000
— L21	2,100

## Air Flow - Static Pressure Characteristics

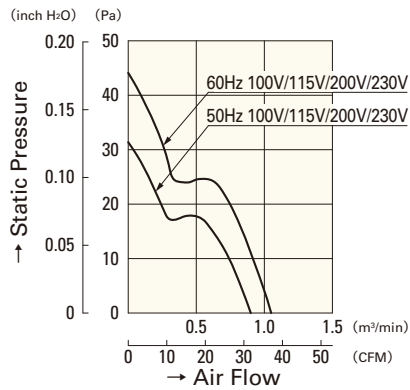

109-150

109-153

109-151

109-154